

MADISON Rain shower with ceiling fixing FlowReduce 200 mm - Durabrand (23kt Gold)

MADISON

28 564 977    Product version from 7/1/2025










- rain shower Ø 200 mm
- rain flow
- max. flow 7 l/min
- Function from: 6.5 l/min
- with anti-scale system

Technical data:

- distance between ceiling and lower edge of the shower 185mm
- rosette Ø 55 mm
- 1/2" connection

Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


	Durabrand (23kt Gold)	28 564 977-09
	Chrome	28 564 977-00
	Brushed Platinum	28 564 977-06
	Platinum	28 564 977-08
	Brushed Durabrand (23kt Gold)	28 564 977-28
	Brushed Dark Brass	28 564 977-39
	Brushed Dark Platinum	28 564 977-99



MADISON Rain shower with ceiling fixing FlowReduce 200 mm - Durabrass  
(23kt Gold)

MADISON

28 564 977    Product version from 7/1/2025  
mm [inches]

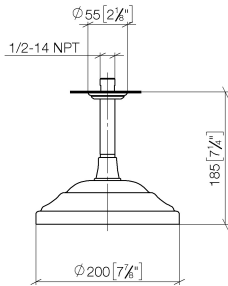

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## MADISON Rain shower with ceiling fixing FlowReduce 200 mm - Durabrass (23kt Gold)

MADISON

---

28 564 977 Product version from 7/1/2025


Certificates and sustainability

---

LGA\_38

WRAS\_250102

28 564 977    Product version from 7/1/2025  
Parts for other  
finishes can be found  
here: [Chrome](#)

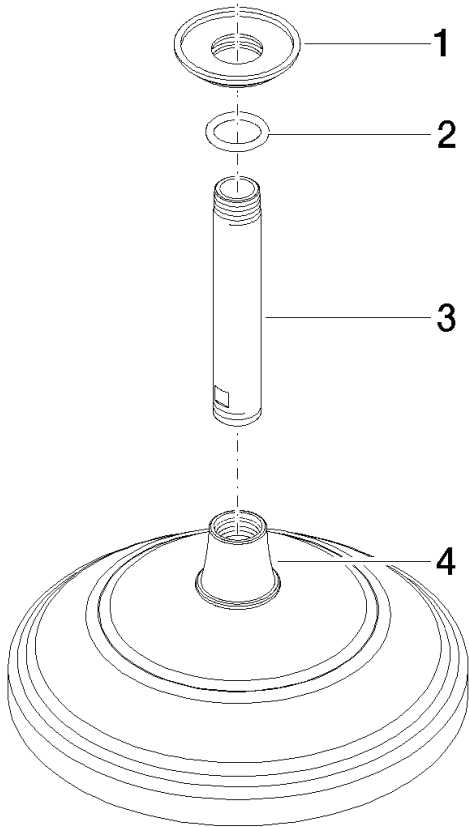

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	3 09 11 03 018-09	connection	1.00	40
	4 90 12 05 038 20-09	shower	1.00	40
	1 09 27 35 003-09	rosette	1.00	40
	2 90 14 10 026 00 90	seal	1.00	2