

TARA ULTRA POT FILLER Cold-water valve - Dark Chrome

30 805 875



- 500mm projection
- pivoting spout
- laminar flow
- cold water only
- max. flow 5.7 l/min at 3 bar flow pressure
- min. recess depth 125 mm
- max. recess depth 80 mm
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

| | | |
|--|-------------------------------|---------------|
|  | Dark Chrome | 30 805 875-19 |
|  | Chrome | 30 805 875-00 |
|  | Brushed Platinum | 30 805 875-06 |
|  | Platinum | 30 805 875-08 |
|  | Durabrass (23kt Gold) | 30 805 875-09 |
|  | Brushed Durabrass (23kt Gold) | 30 805 875-28 |
|  | Brushed Champagne (22kt Gold) | 30 805 875-46 |
|  | Champagne (22kt Gold) | 30 805 875-47 |
|  | Brushed Chrome | 30 805 875-93 |
|  | Brushed Dark Platinum | 30 805 875-99 |

Required miscellaneous


POT FILLER Concealed wall elbow 35 087 970 90



- min. recess depth mm
- max. recess depth mm

TARA ULTRA POT FILLER Cold-water valve - Dark Chrome

30 805 875

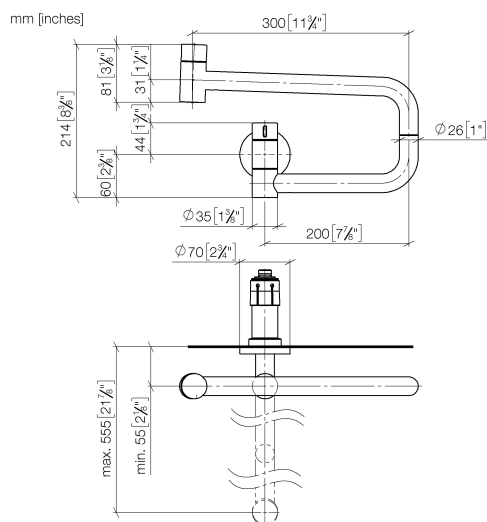

Flow rate chart



Codes & Standards

| | | | |
|----------------|-------|------------------------|-----------------------------|
| ASME A112.18.1 | cUPC | DIN 4109 | ISO 3822 |
| NSF372 | NSF61 | Scottish Water Byelaws | UK Water Supply Regulations |

Ü-Zeichen



TARA ULTRA POT FILLER Cold-water valve - Dark Chrome

30 805 875

Certificates

| | | | | |
|--------|-----------|---------|-------------|--------------|
| LGA_29 | IAPMO_N-4 | IAPMO_6 | WRAS_240702 | IAPMO_4976 (|
|--------|-----------|---------|-------------|--------------|

TARA ULTRA POT FILLER Cold-water valve - Dark Chrome

30 805 875

