


Concealed two-way diverter -

35 124 970 90




- red brass, lead-free
- 2x female thread 1/2" connections
- 2x female thread 1/2" outlet
- cut-to-length spindle and sleeve
- dust cover
- anti-water packing
- soundproofing

Concealed two-way diverter -


35 124 970 90

mm [inches]

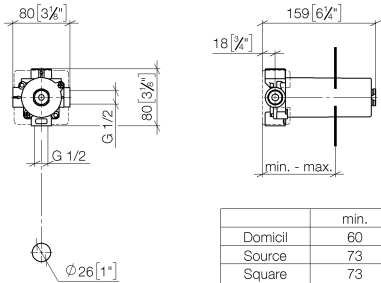

	min.	max.
Domicil	60	105
Source	73	123
Square	73	123
Madison	73	138
LULLU	73	146
Madison Flair	73	148
Just	78	148
LaFleur	83	148
Supernova	83	148
Tara.	83	148
Vaia	83	148
MEM	108	148
CL.1	108	148

Flow rate chart

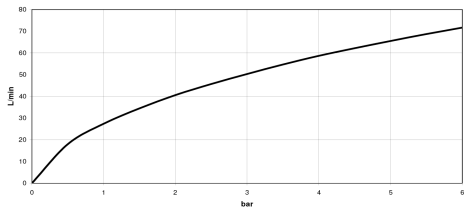

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



Concealed two-way diverter -

35 124 970 90

Certificates


LGA_28

Concealed two-way diverter -

35 124 970 90

Product version up to 5/15/2020

Product version from 5/15/2020

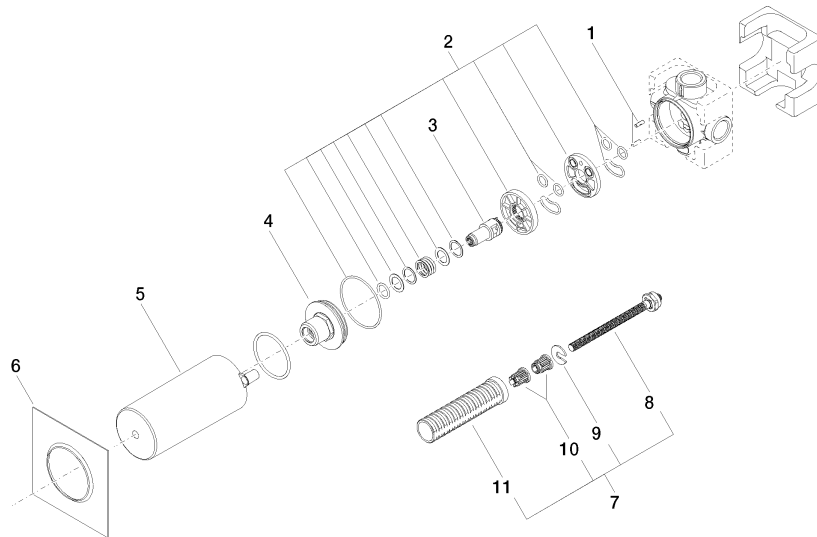



Concealed two-way diverter -

35 124 970 90

Spare parts list

Product version up to 5/15/2020

Product version from 5/15/2020

No.	Item Number	Name	Quantity used	Delivery time
	09 31 11 151 90	pin	12	2