

## xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC

36 501 979 Product version from 9/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Light Gold	36 501 979-27
	Chrome	36 501 979-00
	Brushed Platinum	36 501 979-06
	Platinum	36 501 979-08
	Durabronze (23kt Gold)	36 501 979-09
	Dark Chrome	36 501 979-19
	Light Gold	36 501 979-26
	Brushed Durabronze (23kt Gold)	36 501 979-28
	Matte Black	36 501 979-33
	Brushed Dark Brass	36 501 979-39
	Brushed Bronze	36 501 979-42
	Brushed Champagne (22kt Gold)	36 501 979-46
	Champagne (22kt Gold)	36 501 979-47
	Brushed Chrome	36 501 979-93
	Brushed Dark Platinum	36 501 979-99

### Required miscellaneous



- xTOOL Concealed thermostat module without volume control -** 35 503 970 90
- min. recess depth 85 mm
  - max. recess depth 110 mm
  - integrated pre-seals

### Required miscellaneous



- xGRID Installation track 555 mm -** 12 360 970 90

### Recommended miscellaneous




- xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


## xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC

36 501 979 Product version from 9/1/2022

mm [inches]

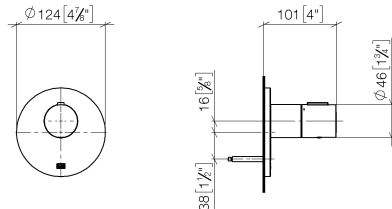

### Flow rate chart

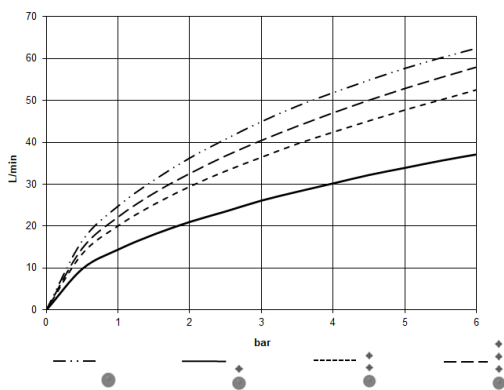

### Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold    SERIES SPECIFIC

---

36 501 979    Product version from 9/1/2022

Certificates and sustainability

---

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

**xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC**

36 501 979 Product version from 9/1/2022

