









MADISON xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabrass (23kt Gold)

MADISON


36 503 977
Product version up to 1/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Durabrass (23kt Gold)	36 503 977-28
	Chrome	36 503 977-00
	Brushed Platinum	36 503 977-06
	Platinum	36 503 977-08
	Durabrass (23kt Gold)	36 503 977-09
	Brushed Dark Brass	36 503 977-39
	Brushed Dark Platinum	36 503 977-99


Required miscellaneous



**xTOOL Concealed thermostat module without volume control -**
35 503 970 90


- max. recess depth 110 mm
- min. recess depth 85 mm

Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -**
12 340 970 90

Required miscellaneous




**xGRID Installation track 555 mm -**
12 360 970 90


**MADISON xTOOL Concealed thermostat without volume control 3/4" - Brushed  
Durabron (23kt Gold)**

MADISON

36 503 977    Product version up to 1/1/2022  
mm [inches]

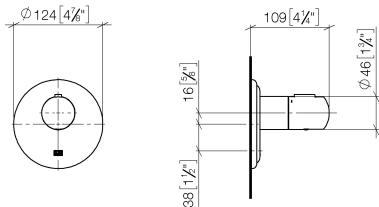

**Flow rate chart**

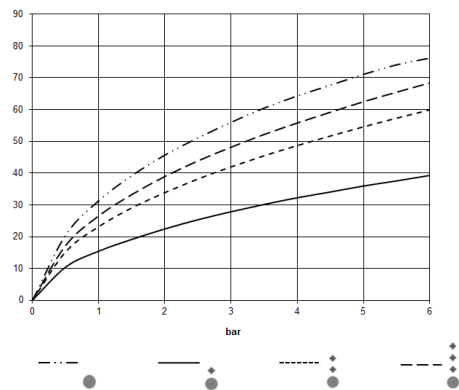

**Codes & Standards**

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		




MADISON xTOOL Concealed thermostat without volume control 3/4" - Brushed  
Durabrass (23kt Gold)

MADISON

36 503 977    Product version up to 1/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29	LGA_29
-----------	---------------------	--------	--------

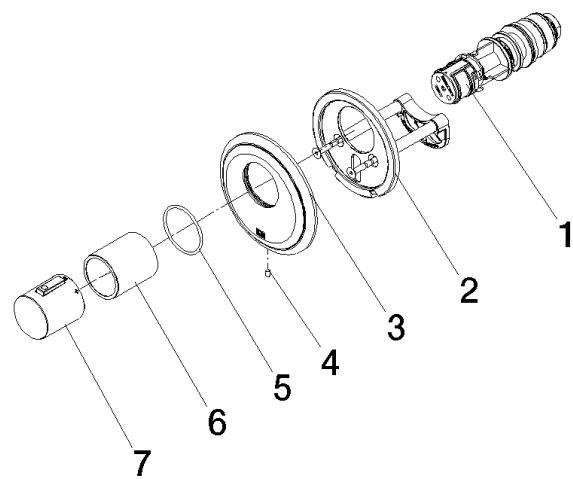

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	2 90 11 01 196 00 90	base	1.00	2
	3 09 11 02 543-28	cover	1.00	20
	4 09 31 11 048 90	pin	1.00	2
	5 90 14 10 049 00 90	seal	1.00	2
	7 90 17 33 005 01-28	handle	1.00	20
	6 90 21 02 112 00-28	sleeve	1.00	20
	1 90 15 02 063 00 90	cartridge	1.00	2