

**xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabrand (23kt Gold)**

36 503 979 Product version from 9/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Durabrand (23kt Gold)	36 503 979-28
	Chrome	36 503 979-00
	Brushed Platinum	36 503 979-06
	Platinum	36 503 979-08
	Durabrand (23kt Gold)	36 503 979-09
	Dark Chrome	36 503 979-19
	Light Gold	36 503 979-26
	Brushed Light Gold	36 503 979-27
	Matte Black	36 503 979-33
	Brushed Bronze	36 503 979-42
	Brushed Champagne (22kt Gold)	36 503 979-46
	Champagne (22kt Gold)	36 503 979-47
	Brushed Chrome	36 503 979-93
	Brushed Dark Platinum	36 503 979-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 • max. recess depth mm  
 • min. recess depth mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

**Required miscellaneous**




**xGRID Installation track 555 mm -** 12 360 970 90




xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabronze  
(23kt Gold)

36 503 979    Product version from 9/1/2022  
mm [inches]

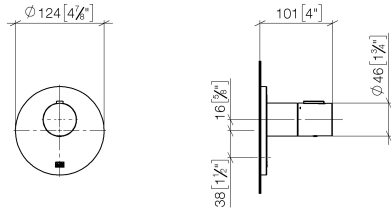

Flow rate chart

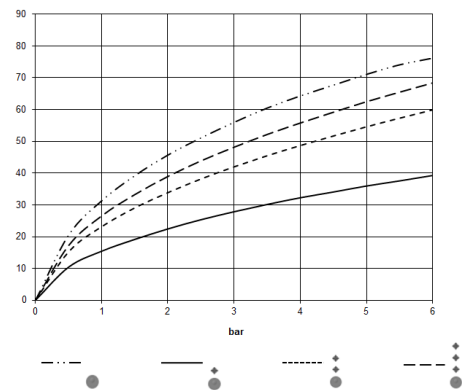

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabrass  
(23kt Gold)


36 503 979    Product version from 9/1/2022

Certificates

WRAS_2011	DVGW_DW- 6512DN0	LGA_29	LGA_29
-----------	---------------------	--------	--------

## xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabross (23kt Gold)

36 503 979 Product version from 9/1/2022

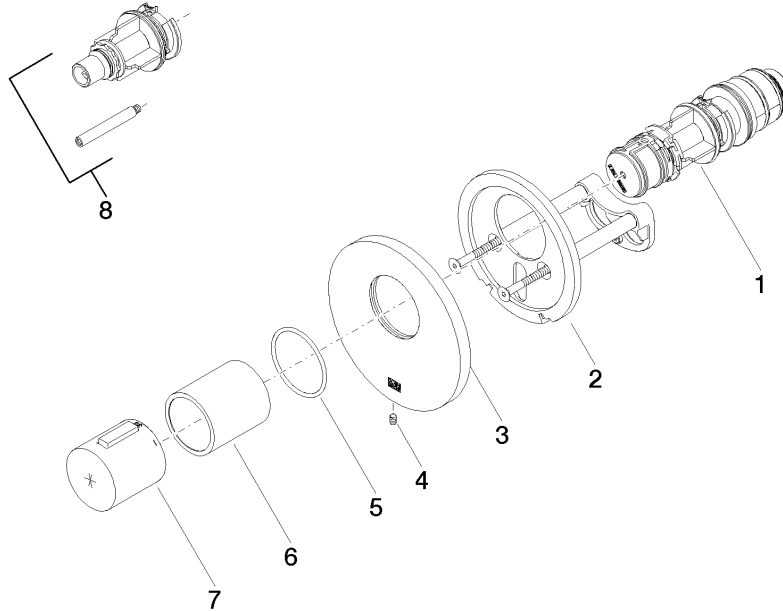

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 02 063 00 90	cartridge	1	2
2	90 11 01 196 00 90	base	1	2
3	09 11 02 537-28	cover	1	20
4	09 31 11 048 90	pin	1	2
5	90 14 10 049 00 90	seal	1	2
6	90 21 02 112 00-28	sleeve	1	20
7	90 17 33 020 00-28	handle	1	20
8	12 178 970 90	Extension 46 mm -	1	2