

## SERENITY SKY Rain panel for recessed ceiling installation - Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 770 979 Product version from 9/1/2024



- exposed trim parts
- Rain panel with 2 different spray modes
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- with anti-scale system

### Technical data:

- Rain panel, 600 x 420 mm
- min. recess depth 150 mm
- weight 15kg

### technical data:

### Sanitary:

- recommended water hardness: 6-7 °dH - if the water is harder, integrate a water softener that uses the ion exchange principle into the feed pipe.
- for choosing the drainage, taking into consideration the discharge of all the products in the shower, the specific demand needs to be assessed.  
Recommendation: Floor drain (connected rating) = 1l/sec, drainage rate DN 50
- feed pipe (hot/cold): 2x DN 20
- For the optimum choice of hot water storage device - taking into consideration additional drawing-off points and the frequency with which the rain panels are used - the specific demand needs to be assessed

### Notes:

- Not suitable for use in a steam room.
- Recommended control element: xTool

|  |                               |               |
|--|-------------------------------|---------------|
|  | Brushed Champagne (22kt Gold) | 41 770 979-46 |
|  | Chrome                        | 41 770 979-00 |
|  | Dark Chrome                   | 41 770 979-19 |
|  | Brushed Bronze                | 41 770 979-42 |
|  | Champagne (22kt Gold)         | 41 770 979-47 |
|  | Brushed Stainless Steel       | 41 770 979-86 |
|  | Brushed Dark Platinum         | 41 770 979-99 |

## Required miscellaneous



### SERENITY SKY Concealed ceiling installation box - 35 770 970 90


- concealed rough parts
- 2x female thread 1/2" connections
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- min. recess depth 150 mm
- weight 15kg
- Recommended control element: xTool

## SERENITY SKY Rain panel for recessed ceiling installation - Brushed Champagne (22kt Gold)


SERIES-VARIOUS

41 770 979 Product version from 9/1/2024

mm [inches]  
1:10

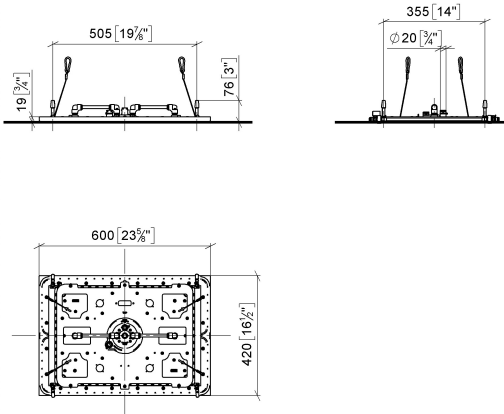

### Flow rate chart

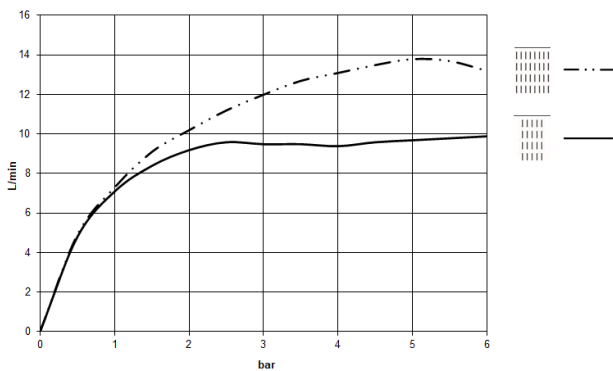

### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

### Ü-Zeichen



SERENITY SKY Rain panel for recessed ceiling installation - Brushed  
Champagne (22kt Gold)

SERIES-VARIOUS

---


41 770 979 Product version from 9/1/2024

Certificates and sustainability

---

LGA\_38

WRAS\_250102

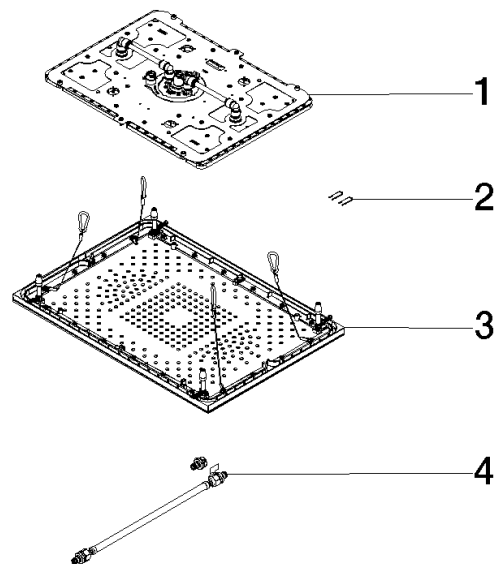

Spare parts list

| No. | Item Number        | Name   | Quantity used | Delivery time |
|-----|--------------------|--------|---------------|---------------|
| 2   | 91 16 02 053 00 90 | holder | 1.00          | 2             |
| 4   | 90 30 04 033 00 90 | hose   | 1.00          | 2             |
| 1   | 90 12 01 095 02 90 | shower | 1.00          | 2             |
| 3   | 90 12 05 106 00-46 | cover  | 1.00          | 30            |