




CL.1 Three-hole basin mixer without pop-up waste - Chrome

CL.1

ST 010 101 5705



- 160mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- height of mixer 108 mm
- height up to aerator 94 mm
- hole diameter valve 32 mm
- hole diameter spout 35 mm
- rosette 60 x 47 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- max. flow 4 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Chrome	ST 010 101 5705-00
	Brushed Platinum	ST 010 101 5705-06
	Brushed Dark Platinum	ST 010 101 5705-99

Individual components of this set

You need the following components for this set

1x 13 714 705-00



1x 20 004 716-00



1x 20 004 715-00









CL.1 Three-hole basin mixer without pop-up waste - Chrome

CL.1

ST 010 101 5705



- 160mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- height of mixer 108 mm
- height up to aerator 94 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 4 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS 1512011

	Chrome	13 714 705-0
	Brushed Platinum	13 714 705-0
	Dark Chrome	13 714 705-1
	Brushed Champagne (22kt Gold)	13 714 705-4
	Champagne (22kt Gold)	13 714 705-4
	Brushed Dark Platinum	13 714 705-9



CL.1 Three-hole basin mixer without pop-up waste - Chrome


CL.1

ST 010 101 5705


0
—
6
—
9
—
6
—
7
—
9
—

ST 010 101 5705

mm [inches]

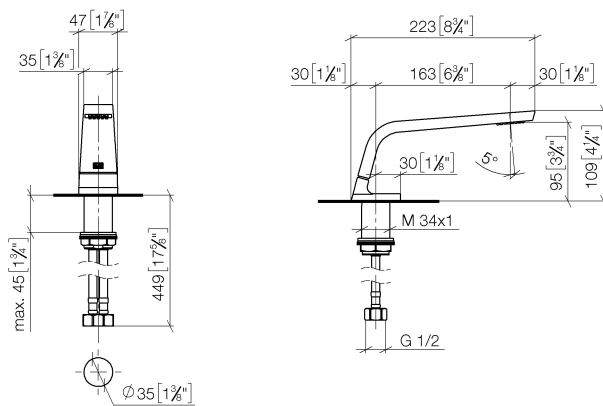

Flow rate chart

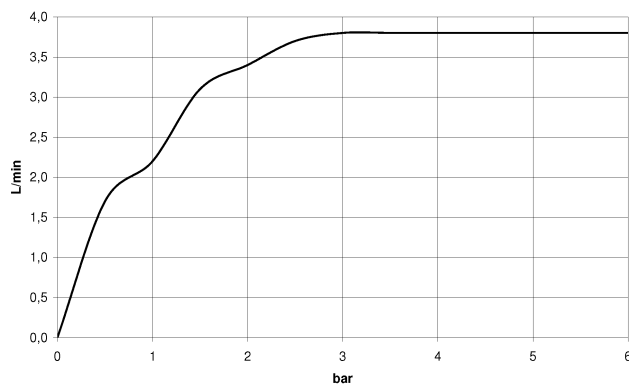

Certificates

LGA_28

GDV_0400

IAPMO_N-4


IAPMO_8834

IAPMO_6

IAPMO_4976


WRAS_1512

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	EPA WaterSense
Executive Order no. 1007	ISO 3822	NSF372	NSF61
Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen	WaterSense 

Product version from 6/15/2021

Product version from 7/1/2021 to 6/15/2021

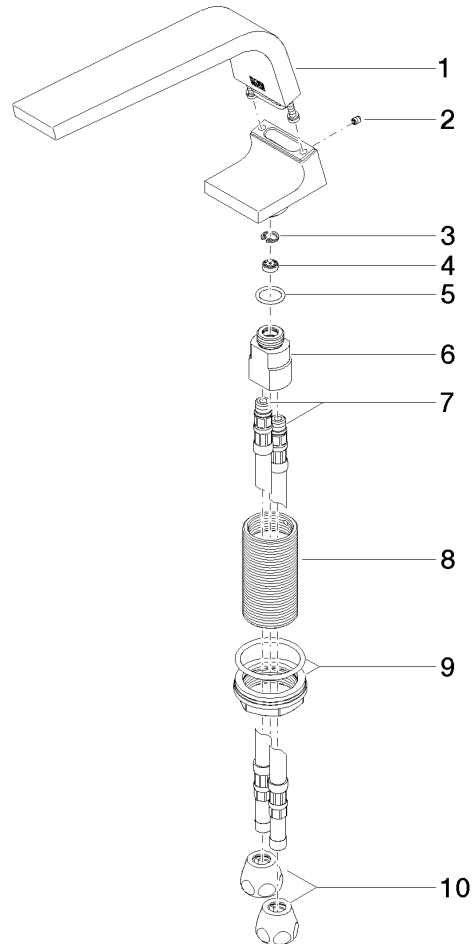



CL.1 Three-hole basin mixer without pop-up waste - Chrome

CL.1

ST 010 101 5705

Spare parts list

Product version from 6/15/2021

Product version from 7/1/2021 to 6/15/2021

No.	Item Number	Name	Quantity used	Delivery time
	90 11 70 002 00-00	spout	12	10

CL.1 Three-hole basin mixer without pop-up waste - Chrome







CL.1

ST 010 101 5705



- hole diameter 32 mm
- rosette 60 x 47 mm
- with cold marking

Fits: CL.1, CYO

	Chrome	20 004 716-0
	Brushed Platinum	20 004 716-0
	Brushed Durabronze (23kt Gold)	20 004 716-2
	Brushed Champagne (22kt Gold)	20 004 716-4
	Champagne (22kt Gold)	20 004 716-4
	Brushed Dark Platinum	20 004 716-9



CL.1 Three-hole basin mixer without pop-up waste - Chrome


CL.1

ST 010 101 5705


0
—
6
—
8
—
6
—
7
—
9
—

ST 010 101 5705

mm [inches]

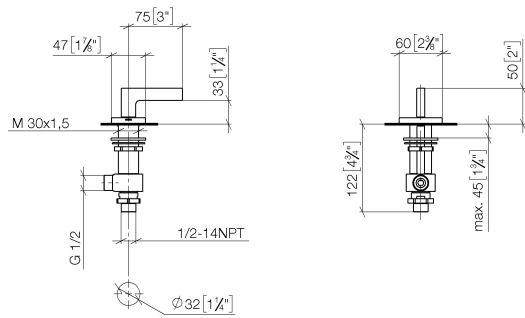

Flow rate chart

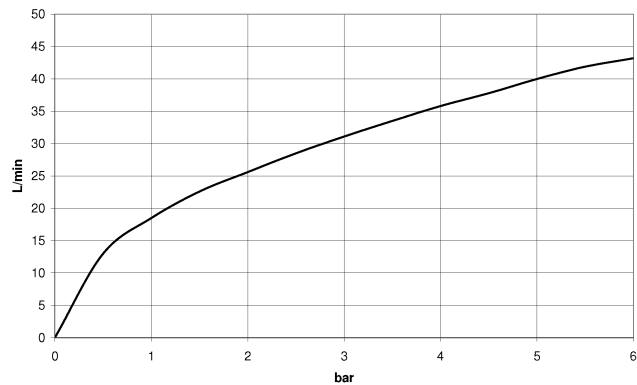

Certificates

IAPMO_4976 IAPMO_N-4 LGA_28 IAPMO_6



CL.1 Three-hole basin mixer without pop-up waste - Chrome

CL.1


ST 010 101 5705

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
NSF372	NSF61	Ü-Zeichen	

Product version from 6/1/2015

Parts for other
finishes can be found
here: Brushed
Platinum

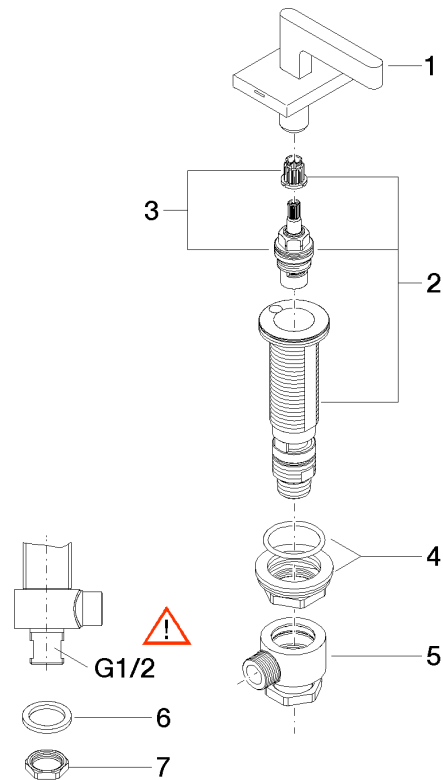

ST 010 101 5705

Spare parts list
Product version from 6/1/2015

No.	Item Number	Name	Quantity used	Delivery time
	90 20 70 057 03-00	handle (cold)	7	10

CL.1 Three-hole basin mixer without pop-up waste - Chrome







CL.1

ST 010 101 5705

- hole diameter 32 mm
- rosette 60 x 47 mm
- with hot marking



Fits: CL.1, CYO


	Chrome	20 004 715-0
	Brushed Platinum	20 004 715-0
	Brushed Durabronze (23kt Gold)	20 004 715-2
	Brushed Champagne (22kt Gold)	20 004 715-4
	Champagne (22kt Gold)	20 004 715-4
	Brushed Dark Platinum	20 004 715-9

ST 010 101 5705


0
—
6
—
8
—
6
—
7
—
9
—

ST 010 101 5705

mm [inches]

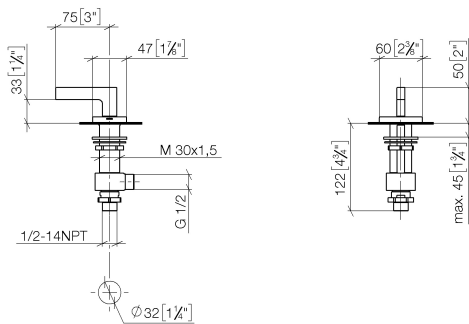

Flow rate chart

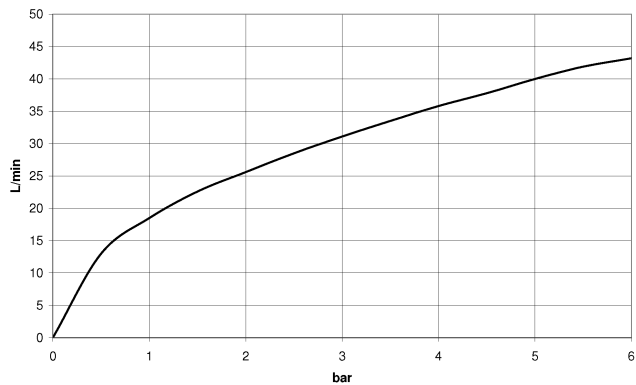


Certificates

IAPMO_4976 IAPMO_N-4 LGA_28 IAPMO_6

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
NSF372	NSF61	Ü-Zeichen	

Product version from 6/1/2015

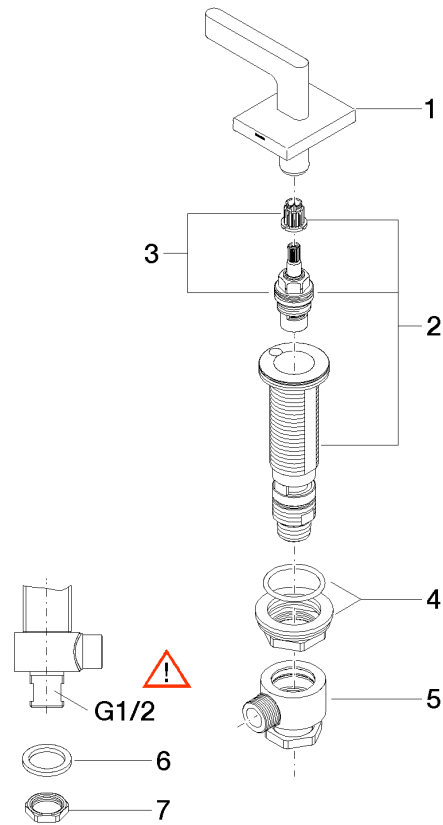

ST 010 101 5705

Spare parts list

Product version from 6/1/2015

No.	Item Number	Name	Quantity used	Delivery time
	90 20 70 057 02-00	handle (hot)	7	10