







CL.1 Wall-mounted basin mixer without pop-up waste - Brushed Dark Platinum

CL.1

ST 010 201 0705




- 200mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- hole diameter valve 35 mm
- hole diameter spout 40 mm
- rosette 60 x 60 mm
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Dark Platinum	ST 010 201 0705-99
	Chrome	ST 010 201 0705-00
	Brushed Platinum	ST 010 201 0705-06
	Dark Chrome	ST 010 201 0705-19
	Brushed Champagne (22kt Gold)	ST 010 201 0705-46
	Champagne (22kt Gold)	ST 010 201 0705-47

Individual components of this set

You need the following components for this set

1x	13 800 705-99	1x	36 607 706-99
			
1x	36 607 707-99		
			







CL.1 Wall-mounted basin mixer without pop-up waste - Brushed Dark Platinum

CL.1

ST 010 201 0705




- 200mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- hole diameter 37 mm
- lead-free
- 1/2" connection
- plug-link mounting
- max. flow 4.5 l/min
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS 1512013

	Brushed Dark Platinum	13 800 705-9
	Chrome	13 800 705-0
	Brushed Platinum	13 800 705-0
	Dark Chrome	13 800 705-1
	Brushed Champagne (22kt Gold)	13 800 705-4
	Champagne (22kt Gold)	13 800 705-4

ST 010 201 0705


9
—
0
—
6
—
9
—
6
—
7
—

Recommended miscellaneous


		35 085 970 90
	Concealed wall elbow -	
	•max. recess depth 163 mm	
	•min. recess depth 90 mm	

ST 010 201 0705

mm [inches]

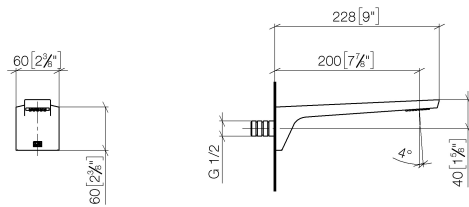

Flow rate chart

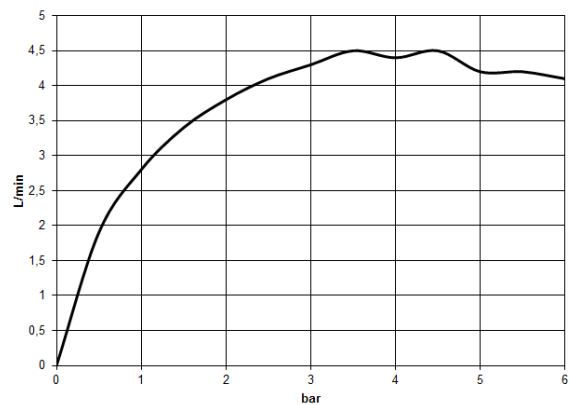


Certificates


IAPMO_4976 IAPMO_N-4 IAPMO_8834 LGA_28 IAPMO_6

WRAS_1512

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	EPA WaterSense
ISO 3822	NSF372	NSF61	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen	WaterSense	

Product version from 3/9/2015

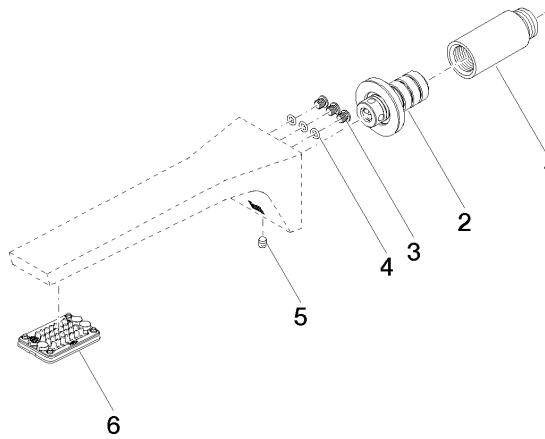



CL.1 Wall-mounted basin mixer without pop-up waste - Brushed Dark Platinum

CL.1

ST 010 201 0705

Spare parts list

Product version from 3/9/2015

No.	Item Number	Name	Quantity used	Delivery time
	09 24 03 081 10 90	extension	10	2







CL.1 Wall-mounted basin mixer without pop-up waste - Brushed Dark Platinum

CL.1

ST 010 201 0705




- rosette 60 x 60 mm
- with cold marking
- head part with cut-to-length spindle and sleeve
- WRAS 2010066

	Brushed Dark Platinum	36 607 706-9
	Chrome	36 607 706-0
	Brushed Platinum	36 607 706-0
	Dark Chrome	36 607 706-1
	Brushed Champagne (22kt Gold)	36 607 706-4
	Champagne (22kt Gold)	36 607 706-4

ST 010 201 0705


9
—
0
—
6
—
9
—
6
—
7
—

Required miscellaneous

		35 607 970 90
	Wall valve 1/2" -	
	•max. recess depth 150 mm	
	•min. recess depth 105 mm	

ST 010 201 0705

mm [inches]




Certificates

IAPMO_4976	DVGW_DW-6501DN0	WRAS_2010	LGA_29	LGA_29
------------	-----------------	-----------	--------	--------

Codes & Standards			
ASME A112.18.1	cUPC	DIN 4109	EN 200
ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen

Product version up to 10/14/2020

Product version from 10/14/2020

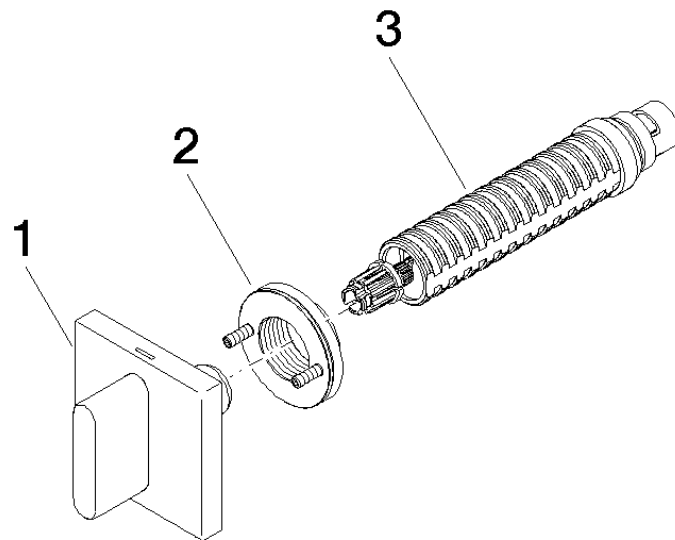

ST 010 201 0705

Spare parts list

Product version up to 10/14/2020

Product version from 10/14/2020

No.	Item Number	Name	Quantity used	Delivery time
	90 20 70 051 02-99	handle (cold)	3	30







CL.1 Wall-mounted basin mixer without pop-up waste - Brushed Dark Platinum

CL.1

ST 010 201 0705




- rosette 60 x 60 mm
- with hot marking
- head part with cut-to-length spindle and sleeve
- WRAS 2010066

	Brushed Dark Platinum	36 607 707-9
	Chrome	36 607 707-0
	Brushed Platinum	36 607 707-0
	Dark Chrome	36 607 707-1
	Brushed Champagne (22kt Gold)	36 607 707-4
	Champagne (22kt Gold)	36 607 707-4

ST 010 201 0705


9
—
0
—
6
—
9
—
6
—
7
—

Required miscellaneous

		35 607 970 90
	Wall valve 1/2" -	
	•max. recess depth 150 mm	
	•min. recess depth 105 mm	

ST 010 201 0705

mm [inches]



Certificates

IAPMO_4976

DVGW_DW-
6501DN0

WRAS_2010


LGA_29

LGA_29

Codes & Standards			
ASME A112.18.1	cUPC	DIN 4109	EN 200
ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen

Product version up to 10/14/2020

Product version from 10/14/2020

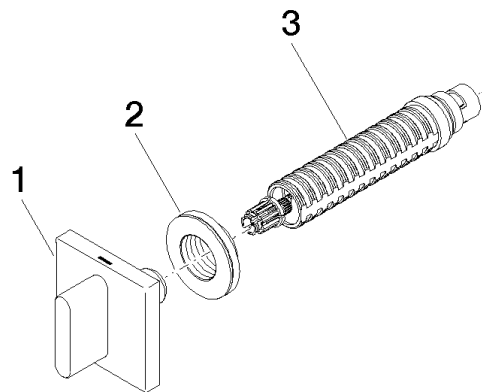

ST 010 201 0705

Spare parts list

Product version up to 10/14/2020

Product version from 10/14/2020

No.	Item Number	Name	Quantity used	Delivery time
	90 20 70 051 03-99	handle (hot)	3	30