

IMO xTOOL Thermostat module with 3 valves - Brushed Durabrand (23kt Gold) IMO

ST 060 111 3980



- cover plate 120 x 120 mm
- rosette 60 x 60 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- 3x head part with cut-to-length spindle and sleeve

	Brushed Durabrand (23kt Gold)	ST 060 111 3980-28
	Chrome	ST 060 111 3980-00
	Brushed Platinum	ST 060 111 3980-06
	Platinum	ST 060 111 3980-08
	Dark Chrome	ST 060 111 3980-19
	Brushed Light Gold	ST 060 111 3980-27
	Matte Black	ST 060 111 3980-33
	Brushed Chrome	ST 060 111 3980-93
	Brushed Dark Platinum	ST 060 111 3980-99

Individual components of this set

You need the following components for this set



1x 36 503 780-28





3x 36 607 980-28

ST 060 111 3980

Error: Subreport could not be shown.



- rosette 60 x 60 mm
- head part with cut-to-length spindle and sleeve
- WRAS 2011026, 2010066

	Brushed Durabrand (23kt Gold)	36 607 980-2
	Chrome	36 607 980-0
	Brushed Platinum	36 607 980-0
	Platinum	36 607 980-0
	Dark Chrome	36 607 980-1
	Brushed Light Gold	36 607 980-2
	Matte Black	36 607 980-3
	Brushed Chrome	36 607 980-9
	Brushed Dark Platinum	36 607 980-9

ST 060 111 3980

:8  
—  
:0  
—  
:6  
—  
:8  
—  
9  
—  
:7  
—  
:3  
—  
:3  
—  
:9  
—

Required miscellaneous




- Wall valve 1/2" -
- max. recess depth 145 mm
  - min. recess depth 75 mm

35 607 970 90

ST 060 111 3980

mm [inches]



Certificates

DVGW_DW-6501DN0	WRAS_2010	LGA_29	LGA_29	DVGW_DW-6512DN0
WRAS_2011				

Codes & Standards

DIN 4109

EN 1111

EN 200


ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen

**Product version from 6/1/2024**

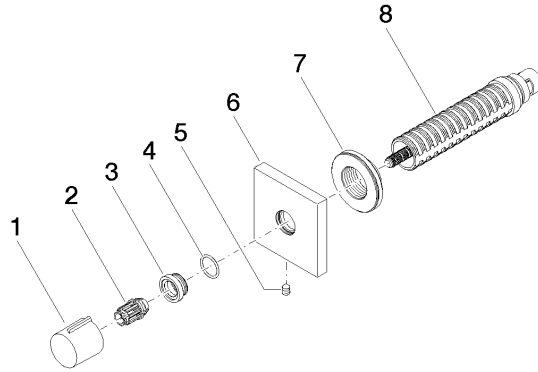



IMO xTOOL Thermostat module with 3 valves - Brushed Durabross (23kt Gold)

IMO

ST 060 111 3980

**Spare parts list**

**Product version from 6/1/2024**

No.	Item Number	Name	Quantity used	Delivery time
	09 20 98 001-28	handle	8	20