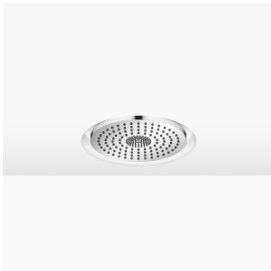


28 034 970






Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system
- central RGBW LED spot
- RGBW LED ambient lighting
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Provided by customer: Zigbee gateway
- Not suitable for use in a steam room.

includes light bulbs with a Class G energy efficiency

includes light bulbs with a Class G energy efficiency

	Chrome	28 034 970-00
	Brushed Platinum	28 034 970-06
	Platinum	28 034 970-08
	Dark Chrome	28 034 970-19
	Light Gold	28 034 970-26
	Brushed Light Gold	28 034 970-27
	Brushed Durabronze (23kt Gold)	28 034 970-28
	Matte Black	28 034 970-33
	Brushed Bronze	28 034 970-42
	Brushed Champagne (22kt Gold)	28 034 970-46
	Champagne (22kt Gold)	28 034 970-47
	Brushed Chrome	28 034 970-93
	Brushed Dark Platinum	28 034 970-99

Required miscellaneous




Concealed ceiling installation box for recessed ceiling installation with light - 35 034 970 90


- flush-mounted reflection box Ø 360 mm RAL 9003 signal white
- recess depth 137mm
- 2x female thread 1/2" outlet
- concealed rough parts
- Supply pipe 7 m
- switching power supply input voltage: 50 to 60 Hz - 100 to 240 VAC
- Output 12V DC SELV / Class II
- ZigBee Light Link RGBW controller
- Must be provided by customer: Zigbee gateway

28 034 970

mm [inches]

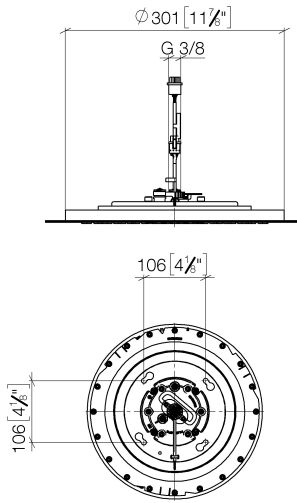


Flow rate chart

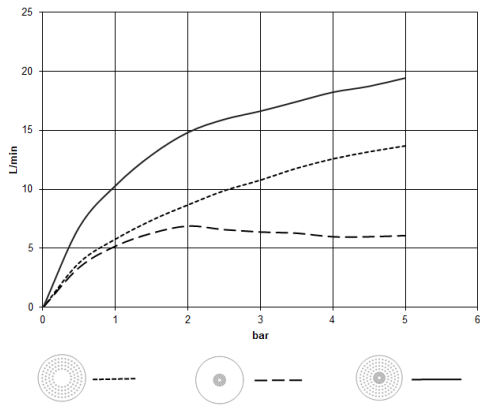

Certificates

LGA_38402.

28 034 970

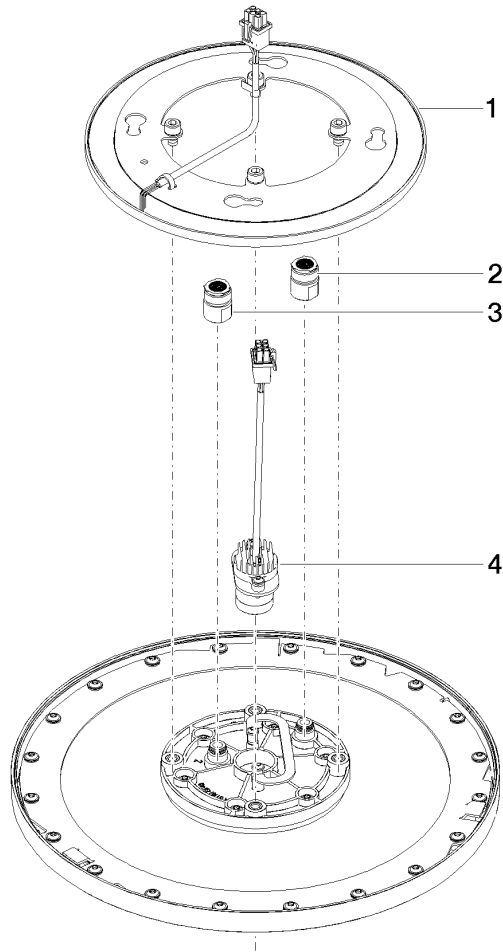

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 221 00 90	electronic accessories	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2
4	90 10 01 225 00 90	electronic accessories	1	2