

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Champagne (22kt Gold) SERIES SPECIFIC

28 041 980 Product version from 5/1/2022



- rain shower 300 x 240mm
 - PURE RAIN, max. flow rate 12 l/min (at 3 bar)
 - PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
 - with anti-scale system
- Technical data:**
- Distance to ceiling from bottom edge of shower 40 mm
- Planning tips:**
- For simultaneous control of the jet types, we recommend the xTool thermostat module
 - Not suitable for use in a steam room.
 - WRAS

	Brushed Champagne (22kt Gold)	28 041 980-46
	Chrome	28 041 980-00
	Brushed Platinum	28 041 980-06
	Platinum	28 041 980-08
	Brushed Durabrand (23kt Gold)	28 041 980-28
	Matte Black	28 041 980-33
	Champagne (22kt Gold)	28 041 980-47
	Brushed Chrome	28 041 980-93
	Brushed Dark Platinum	28 041 980-99


Required miscellaneous



- Concealed ceiling installation box 35 041 970 90 with ceiling fixing -**
- concealed rough parts
 - min. recess depth 90 mm
 - max. recess depth 115 mm
 - 2x female thread " outlet

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Champagne (22kt Gold) SERIES SPECIFIC

28 041 980 Product version from 5/1/2022
mm [inches]

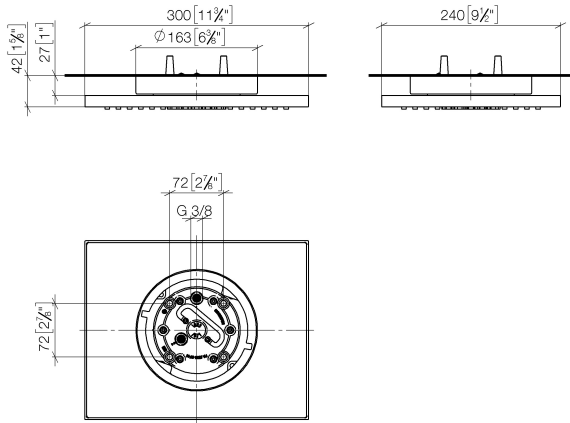

Flow rate chart



Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	---------------------------	--------------------------------

Ü-Zeichen



Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Champagne (22kt Gold) SERIES SPECIFIC

28 041 980 Product version from 5/1/2022

Certificates and sustainability

LGA_38

WRAS_240502

Rain shower for surface-mounted ceiling installation 300 x 240 mm - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 041 980 Product version from 5/1/2022



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2
1	90 17 20 263 00 90	fixing set	1.00	2