




33 845 110




- 237mm projection
  - pivotable spout 120°
  - air-enriched flow and spray flow
  - fabric braided hose 1500 mm
  - max. flow 8.8 l/min at 3 bar flow pressure
- Intrinsic protection against back flow.


	Soft Black	33 845 110-69
	Chrome	33 845 110-00
	Brushed Nickel	33 845 110-70

33 845 110

mm [inches]

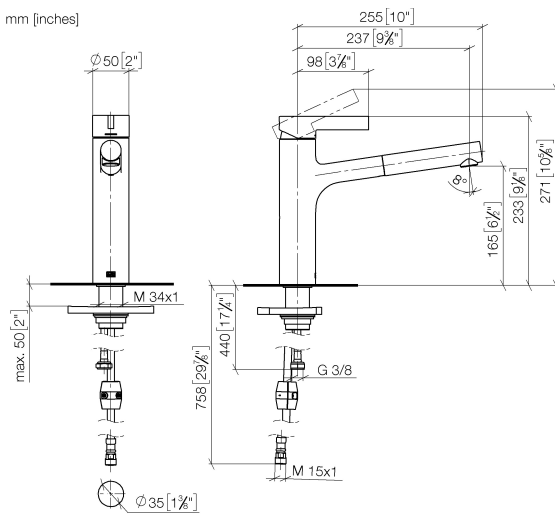

### Flow rate chart

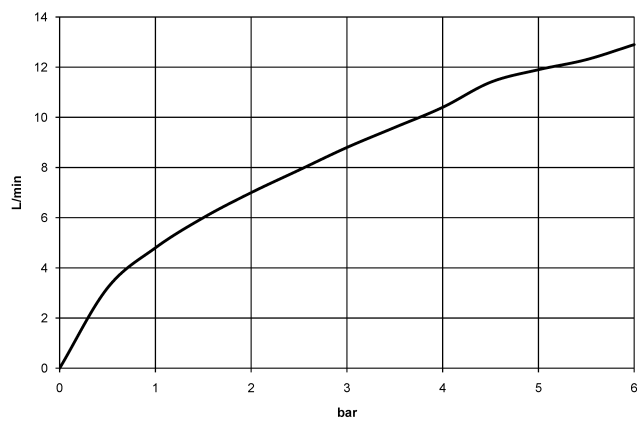

### Codes & Standards

DIN 4109

EN 1717

EN 817

ISO 3822

Ü-Zeichen

XP P 41-280



DORNBRACHT LYV Single-lever mixer Pull-out - Soft Black

DORNBRACHT LYV

33 845 110

Certificates and sustainability

Belgaqua_23-012-2	ACS_23 ACC NY	AbP_10	DVGW_DW-6506DN0
-------------------	---------------	--------	-----------------

33 845 110

Parts for other  
finishes can be found  
here: [Chrome](#)



## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	10 90 30 01 211 00 90	shaft	1.00	2
	2 90 28 30 010 00-69	cover	1.00	2
	3 90 15 05 067 00 90	cartridge	1.00	2
	4 90 18 40 227 00 90	insert	1.00	2
	12 90 23 10 003 00 90	fixing set	1.00	2
	8 90 12 11 180 00-69	shower	1.00	2
	7 90 14 05 081 00 90	seal	1.00	2
	14 90 30 04 110 00 90	hose	1.00	2
	11 90 14 05 080 00 90	seal	1.00	2
	13 04 30 04 100 00 90	hose	2.00	2
	9 90 14 15 062 00 90	gasket kit	1.00	2
	5 90 30 02 101 00 90	hose	1.00	2
	1 90 20 81 001 00-69	handle	1.00	2
	6 90 23 01 051 00 90	flow reducer	1.00	2