












LISSÉ Concealed thermostat with one function volume control - Brushed Platinum


LISSÉ

36 425 845 Product version from 3/9/2016 to 8/24/2020	
	<ul style="list-style-type: none"> • cover plate 150 x 90 mm • temperature control handle with safety limit stop at 38°C • hot water temperature limiter, can be preset • WRAS
	<div>  <div>Brushed Platinum</div> </div> <div>36 425 845-06</div>
	<div>  <div>Chrome</div> </div> <div>36 425 845-00</div>
	<div>  <div>Dark Chrome</div> </div> <div>36 425 845-19</div>
	<div>  <div>Brushed Light Gold</div> </div> <div>36 425 845-27</div>
	<div>  <div>Matte Black</div> </div> <div>36 425 845-33</div>
	<div>  <div>Brushed Chrome</div> </div> <div>36 425 845-93</div>
	<div>  <div>Brushed Dark Platinum</div> </div> <div>36 425 845-99</div>


Required miscellaneous	
	<div> <div>Concealed thermostat with built-in isolators -</div> <div>35 426 970 90</div> </div> <ul style="list-style-type: none"> • max. recess depth 136 mm • min. recess depth 80 mm

Recommended miscellaneous	
	<div> <div>xGRID Attachment set for integrating in the dry wall construction -</div> <div>12 340 970 90</div> </div>


Required miscellaneous	
	<div> <div>Concealed thermostat -</div> <div>35 425 970 90</div> </div> <ul style="list-style-type: none"> • max. recess depth 136 mm • min. recess depth 80 mm

Required miscellaneous	
	<div> <div>xGRID Installation track 555 mm -</div> <div>12 360 970 90</div> </div>

36 425 845 Product version from 3/9/2016 to 8/24/2020
mm [inches]

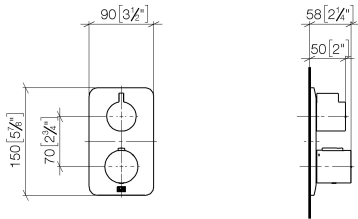

Flow rate chart

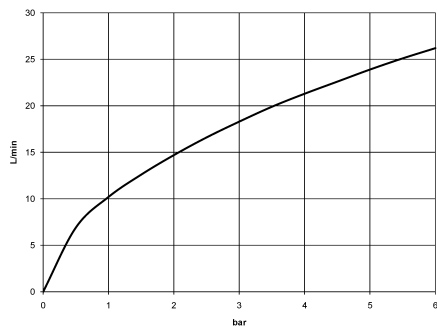

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen	VA-Zeichen	



LISSE Concealed thermostat with one function volume control - Brushed Platinum

LISSE

36 425 845 Product version from 3/9/2016 to 8/24/2020

Certificates and sustainability

LGA_19	ETA_20	DVGW_DW-6512DN0	LGA_19	WRAS_250402
--------	--------	-----------------	--------	-------------

LISSÉ Concealed thermostat with one function volume control - Brushed Platinum

LISSÉ

36 425 845 Product version from 3/9/2016 to 8/24/2020





LISSÉ Concealed thermostat with one function volume control - Brushed Platinum

LISSÉ

36 425 845 Product version from 3/9/2016 to 8/24/2020

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
15	09 28 10 187 90	regulator	1.00	2
5	90 12 12 002 00 90	fixing cap	1.00	2
7	90 17 33 004 00-06	handle	1.00	10
17	09 12 12 051-06	base	1.00	10
1	90 90 03 166 00 90	top	1.00	2
14	09 12 12 054 90	base	1.00	2
19	09 11 02 302-06	plate	1.00	10
18	09 31 11 134 90	pin	1.00	2
2	09 12 12 053-06	base	1.00	10
20	09 30 30 157 90	screw	4.00	2
22	90 30 01 190 00 90	disc	1.00	2
28	09 28 10 189 90	regulator	1.00	2
21	09 30 01 296 90	disc	1.00	2
6	09 20 67 006-06	handle	1.00	10
26	90 15 02 013 00 90	cartridge	1.00	2
27	09 28 10 188 90	regulator	1.00	2
9	90 16 02 027 00 90	spring	1.00	2
25	09 24 04 257 90	nut	2.00	2
3	04 29 06 111 01-00	spindle	1.00	10
24	90 18 40 077 01 90	spindle	2.00	2
12	90 30 30 124 00 90	screw	1.00	2
11	90 31 20 049 00-13	plug	1.00	30
13	90 12 12 052 00 90	base	1.00	2
23	90 23 01 124 00 90	sleeve	2.00	2
16	04 29 06 024 01-00	spindle	1.00	10
4	90 23 30 023 00 90	nut	2.00	2
10	90 30 30 136 00 90	screw	1.00	2
8	90 21 33 011 00-13	handle	1.00	2