

xTOOL Concealed thermostat without volume control 1/2" - Dark Chrome

SERIES SPECIFIC

36 501 780



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

| | | |
|---|-------------------------------|---------------|
|  | Dark Chrome | 36 501 780-19 |
|  | Chrome | 36 501 780-00 |
|  | Brushed Platinum | 36 501 780-06 |
|  | Platinum | 36 501 780-08 |
|  | Brushed Light Gold | 36 501 780-27 |
|  | Brushed Durabrass (23kt Gold) | 36 501 780-28 |
|  | Matte Black | 36 501 780-33 |
|  | Brushed Chrome | 36 501 780-93 |
|  | Brushed Dark Platinum | 36 501 780-99 |

Required miscellaneous



xTOOL Concealed thermostat module without volume control -
35 503 970 90

- max. recess depth 155 mm
- min. recess depth 115 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -
12 340 970 90


Required miscellaneous



xGRID Installation track 555 mm -
12 360 970 90

36 501 780

mm [inches]

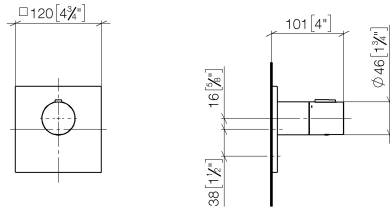

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 1/2" - Dark Chrome

SERIES SPECIFIC

36 501 780

Certificates and sustainability

| | | |
|-----------|---------------------|--------|
| WRAS_2011 | DVGW_DW- 6512DN0 | LGA_29 |
|-----------|---------------------|--------|

36 501 780

