

36 503 892



- cover plate Ø 123 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS 2011026

	Platinum	36 503 892-08
	Chrome	36 503 892-00
	Brushed Platinum	36 503 892-06
	Dark Chrome	36 503 892-19
	Brushed Durabronze (23kt Gold)	36 503 892-28
	Matte Black	36 503 892-33
	Brushed Bronze	36 503 892-42
	Brushed Champagne (22kt Gold)	36 503 892-46
	Champagne (22kt Gold)	36 503 892-47
	Brushed Chrome	36 503 892-93
	Brushed Dark Platinum	36 503 892-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 •max. recess depth 160 mm  
 •min. recess depth 95 mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


**Required miscellaneous**



**xGRID Installation track 555 mm -** 12 360 970 90

36 503 892

mm [inches]

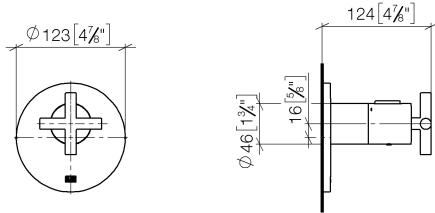

Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen

Certificates

LGA\_29


LGA\_29

LGA\_29

WRAS\_2011

36 503 892

Product version from 5/1/2022

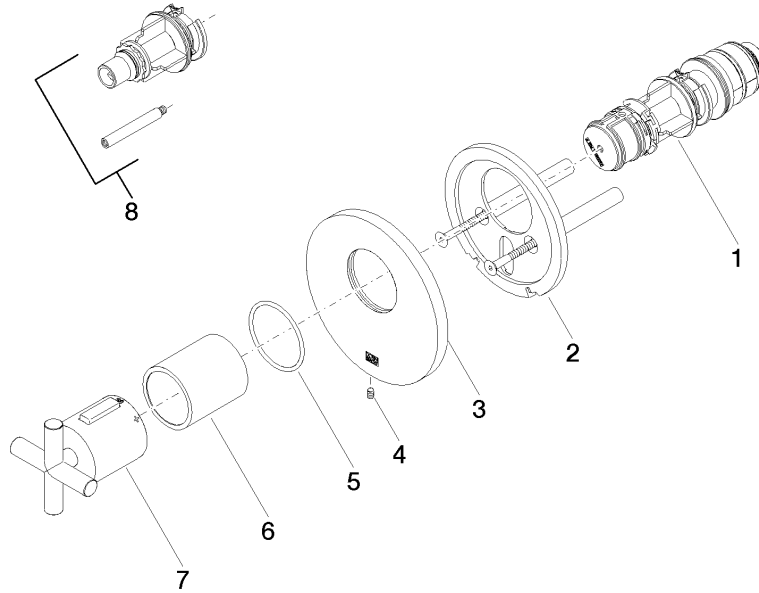



TARA xTOOL Concealed thermostat without volume control 3/4" - Platinum

TARA

36 503 892

**Spare parts list**

**Product version from 5/1/2022**

No.	Item Number	Name	Quantity used	Delivery time
	90 15 02 063 00 90	cartridge	8	2