


**xTOOL Concealed thermostat without volume control 3/4" - Matte Black**

**SERIES SPECIFIC**

36 503 985 Product version up to 1/1/2022



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Matte Black	36 503 985-33
	Chrome	36 503 985-00
	Brushed Platinum	36 503 985-06
	Platinum	36 503 985-08
	Dark Chrome	36 503 985-19
	Brushed Light Gold	36 503 985-27
	Brushed Durabronze (23kt Gold)	36 503 985-28
	Brushed Champagne (22kt Gold)	36 503 985-46
	Champagne (22kt Gold)	36 503 985-47
	Brushed Chrome	36 503 985-93
	Brushed Dark Platinum	36 503 985-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 • max. recess depth 160 mm  
 • min. recess depth 95 mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


**Required miscellaneous**




**xGRID Installation track 555 mm -** 12 360 970 90

36 503 985 Product version up to 1/1/2022

mm [inches]

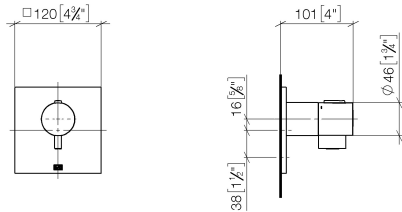

### Flow rate chart

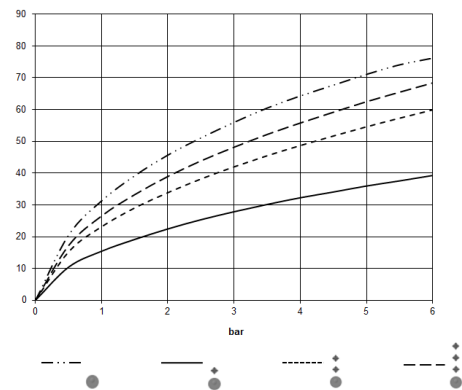

### Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		




xTOOL Concealed thermostat without volume control 3/4" - Matte Black

SERIES SPECIFIC

36 503 985    Product version up to 1/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW-6512DN0	LGA_29	LGA_29
-----------	-----------------	--------	--------

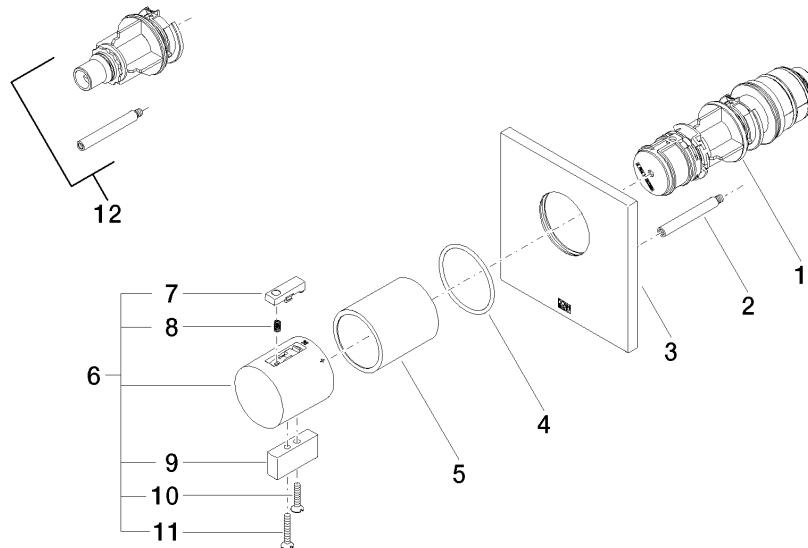

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	3 09 11 02 196-33	cover	1.00	60
	11 09 30 30 160-33	screw	2.00	30
	9 09 20 33 006-33	handle	1.00	30
	6 04 17 33 006 00-33	handle	1.00	60
	12 12 178 970 90	Extension 46 mm -	1.00	2
	8 90 16 02 027 00 90	spring	1.00	2
	10 09 30 30 159-33	screw	1.00	30
	4 90 14 10 049 00 90	seal	1.00	2
	5 90 21 02 112 00-33	sleeve	1.00	30
	2 90 31 09 095 00 90	bar	1.00	2
	7 90 21 33 011 00-13	handle	1.00	2
	1 90 15 02 063 00 90	cartridge	1.00	2