

RAIN SKY M Rain panel for recessed ceiling installation - Brushed Stainless Steel

41 100 979 Product version from 10/1/2023



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- Rain panel with 3 different flow modes
- PURIFY RAIN, 200 x 160 mm, max. flow rate 23.5
- l/min (at 3 bar) FULL RAIN, 360 x 280 mm, max. flow rate 13.6
- l/min (at 3 bar)
- rain curtain 720 x 540mm, 124 nozzles
- cover plate, stainless steel 1020 x 820 x 2 mm
- 3x flexible connection hose 1/2" female thread • 4x M 10 heavy-duty bolt
- pre-fitted, stainless steel enclosure 990 x 790 x 128 mmmm
- 2 hinges and safety chains

technical data:

- minimum flow rate: 35 l/min (all three rain modes together)
- flow at 3bar flow pressure in conjunction with
- xTOOL: 43l/min
- minimum flow pressure 2 bar
- max. flow pressure 4 bar
- weight: 50kg

technical data:

plumbing:

- recommended water hardness: 6-7 °dH if the water is harder, integrate a water softener that
- uses the ion exchange principle into the feed pipe. for the optimum choice of hot water storage device - taking into consideration additional drawing-off points and the frequency with which RainSky M is
 - used the specific demand needs to be assessed.
- for choosing the drainage, taking into consideration the discharge of all the products in the shower, the specific demand needs to be assessed. Recommendation: Floor drain (connected rating) =
- 1.5l/sec, drainage rate DN 70 feed pipe (hot/cold): 2x DN 20

electrical:


- earth-leakage circuit-breaker 30 mA provided
- feeder 3 x 1.5mm2 NYM
- equipotential bonding 1 x 4mm2
- customer must provide a light switch outside the shower area (outside safety zone 2 under DIN VDE 0100, Part 701)
- Rated voltage: 220 240 V AC
- Frequency: 50 60 Hz
- Rated power: 2 x 22 W
- Technology: LED, not dimmable
- Colour temperature: approx. 3000 K

Includes energy efficiency class bulbs




RAIN SKY M Rain panel for recessed ceiling installation - Brushed Stainless Steel

41 100 979 Product version from 10/1/2023 mm [inches] M 1:10



Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



RAIN SKY M Rain panel for recessed ceiling installation - Brushed Stainless Steel


41 100 979 Product version from 10/1/2023 Certificates

LGA_18



RAIN SKY M Rain panel for recessed ceiling installation - Brushed Stainless Steel

41 100 979 Product version from 10/1/2023

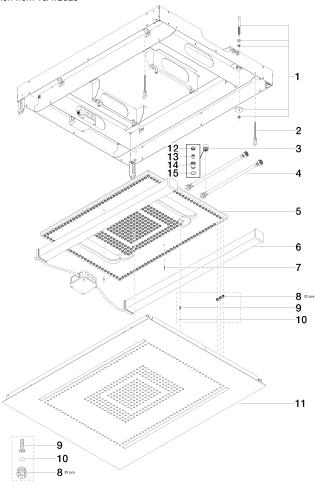

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 30 35 006 01 90	fixing set	4	2
2	04 21 50 004 00 90	accessories	2	2
3	90 24 03 027 02 90	nipple	4	2
4	12 502 970 90	High pressure hose 1/2" x 1/2" x 400 mm -	4	2
5	04 12 05 004 00 90	shower	2	2
6	90 10 01 260 00 90	conversion kit	1	2
7	90 31 11 111 56 90	bolt	1	2
8	90 29 03 035 00 90	insert	15	2
9	09 30 30 047 90	screw	4	2
10	09 31 20 036 90	plug	4	2
11	04 11 02 113 03-86	cover	1	30
12	09 24 04 112 10 90	nipple	4	2
13	09 23 01 042 90	insert	4	2
14	09 24 03 027 90	nipple	4	2
15	09 14 20 025 90	seal	4	2