

ST 060 100 1660



- cover plate Ø 124 mm
- rosette Ø 60 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- head part with cut-to-length spindle and sleeve

	Chrome	ST 060 100 1660-00
	Brushed Platinum	ST 060 100 1660-06
	Dark Chrome	ST 060 100 1660-19
	Light Gold	ST 060 100 1660-26
	Brushed Light Gold	ST 060 100 1660-27
	Matte Black	ST 060 100 1660-33
	Brushed Bronze	ST 060 100 1660-42
	Brushed Chrome	ST 060 100 1660-93
	Brushed Dark Platinum	ST 060 100 1660-99

**Individual components of this set**

You need the following components for this set

1x 36 607 660-00



1x 36 501 979-00

















ST 060 100 1660



- rosette Ø 60 mm
- head part with cut-to-length spindle and sleeve


	Chrome	36 607 660-00
	Brushed Platinum	36 607 660-06
	Platinum	36 607 660-08
	Dark Chrome	36 607 660-19
	Light Gold	36 607 660-26
	Brushed Light Gold	36 607 660-27
	Matte Black	36 607 660-33
	Brushed Bronze	36 607 660-42
	Brushed Champagne (22kt Gold)	36 607 660-46
	Champagne (22kt Gold)	36 607 660-47
	Brushed Chrome	36 607 660-93
	Brushed Dark Platinum	36 607 660-99

**Required miscellaneous**




- Wall valve 1/2" -** 35 607 970 90
- min. recess depth 75 mm
  - max. recess depth 145 mm

ST 060 100 1660

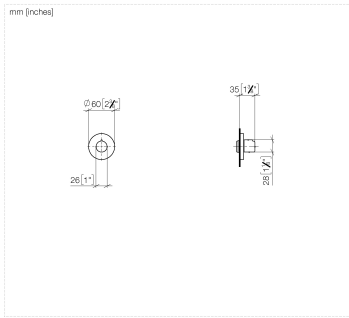

- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS 2011026

	Chrome	36 501 979-00
	Brushed Platinum	36 501 979-06
	Platinum	36 501 979-08
	Durabass (23kt Gold)	36 501 979-09
	Dark Chrome	36 501 979-19
	Light Gold	36 501 979-26
	Brushed Light Gold	36 501 979-27
	Brushed Durabass (23kt Gold)	36 501 979-28
	Matte Black	36 501 979-33
	Brushed Bronze	36 501 979-42
	Brushed Champagne (22kt Gold)	36 501 979-46
	Champagne (22kt Gold)	36 501 979-47
	Brushed Chrome	36 501 979-93
	Brushed Dark Platinum	36 501 979-99



ST 060 100 1660

Required miscellaneous



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
●max. recess depth 110 mm  
●min. recess depth 85 mm

Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous




**xGRID Installation track 555 mm -** 12 360 970 90



ST 060 100 1660

mm [inches]

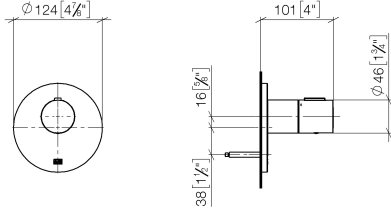

Certificates

WRAS\_2011026.


DVGW\_DW-  
6512DN0706.

LGA\_29930.

LGA\_29932.



ST 060 100 1660

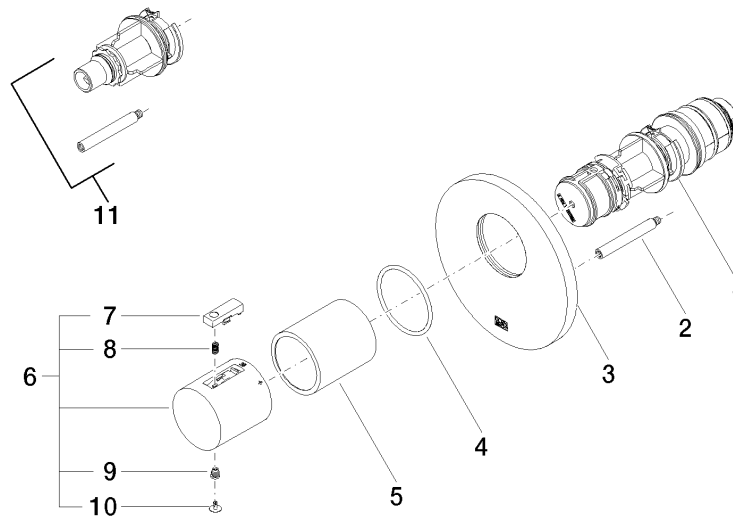

**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 05 065 00 90	cartridge	1	2
2	90 31 09 095 00 90	bar	1	2
3	09 11 02 162-00	cover	1	60
4	90 14 10 049 00 90	seal	1	2
5	90 21 02 112 00-00	sleeve	1	10
6	90 17 33 004 00-00	handle	1	10
7	90 21 33 011 00-13	handle	1	2
8	90 16 02 027 00 90	spring	1	2
9	90 30 30 136 00 90	screw	1	2
10	90 31 20 049 00-00	plug	1	10
11	12 178 970 90	Extension 46 mm -	1	2