

36 120 670 Versión del producto de 20/2/2020



- Conmutación automática
- Cubierta 150 x 90 mm

	Light Gold cepillado	36 120 670-27
	Cromo	36 120 670-00
	Platino cepillado	36 120 670-06
	Platino	36 120 670-08
	Dark Chrome	36 120 670-19
	Latón cepillado (Oro 23k)	36 120 670-28
	Negro mate	36 120 670-33
	Champagne cepillado (Oro 22k)	36 120 670-46
	Champagne (Oro 22k)	36 120 670-47
	Cromo cepillado	36 120 670-93
	Dark Platinum cepillado	36 120 670-99

mm [inches]


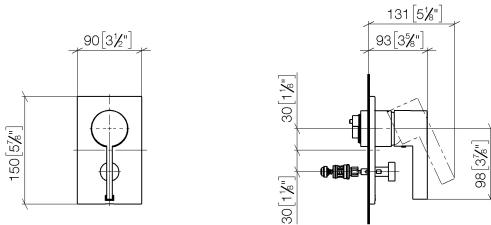


Diagrama de flujo

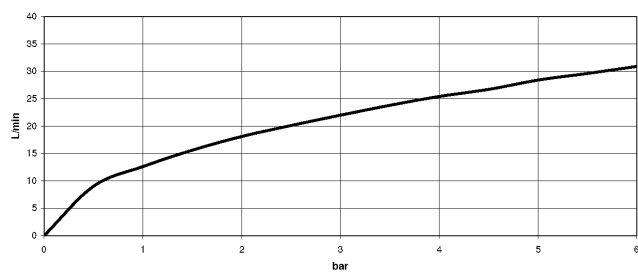

Códigos y Estándares

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Batería monomando empotrada con inversor - Light Gold cepillado

SERIES SPECIFIC

36 120 670 Versión del producto de 20/2/2020

Certificados y sostenibilidad

LGA_19 WRAS_2207

36 120 670 Versión del producto de 20/2/2020

Piezas para otros
acabados pueden
encontrarse aquí:
Cromo

