

27 808 809



- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- with anti-scale system




Technical data:

- rosette for wall elbow Ø 60mm
- rosette for shower holder Ø 60mm
- 1/2" wall elbow

Notes:

- WRAS

Intrinsic protection against back flow.

	Dark Chrome	27 808 809-19 0010
	Chrome	27 808 809-00
	Chrome	27 808 809-00 0010
	Brushed Platinum	27 808 809-06
	Brushed Platinum	27 808 809-06 0010
	Platinum	27 808 809-08 0010
	Platinum	27 808 809-08
	Brushed Durabronze (23kt Gold)	27 808 809-28 0010
	Brushed Durabronze (23kt Gold)	27 808 809-28
	Brushed Dark Brass	27 808 809-39 0010
	Brushed Dark Brass	27 808 809-39
	Brushed Bronze	27 808 809-42
	Brushed Bronze	27 808 809-42 0010
	Brushed Champagne (22kt Gold)	27 808 809-46 0010
	Champagne (22kt Gold)	27 808 809-47 0010
	Brushed Dark Platinum	27 808 809-99
	Brushed Dark Platinum	27 808 809-99 0010


Recommended miscellaneous

- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
 - min. recess depth 90 mm



27 808 809

mm [inches]

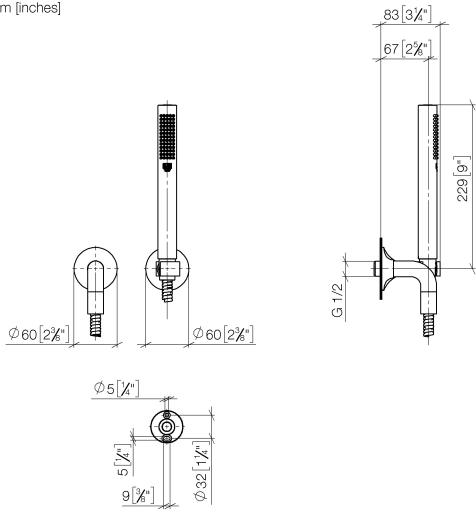

Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

ISO 3822

Ü-Zeichen

Certificates and sustainability

LGA_29

IAPMO_4976

