

MADISON Hand shower FlowReduce - Chrome

MADISON

28 002 978 Product version from 7/1/2025



- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate 6.8 l/min (at 3 bar)
- with anti-scale system
- spray head Ø 95mm
- 1/2" connection
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


Intrinsic protection against back flow.

| | | |
|---|-------------------------------|--------------------|
|  | Chrome | 28 002 978-00 0010 |
|  | Chrome | 28 002 978-00 |
|  | Brushed Platinum | 28 002 978-06 |
|  | Brushed Platinum | 28 002 978-06 0010 |
|  | Platinum | 28 002 978-08 |
|  | Platinum | 28 002 978-08 0010 |
|  | Durabrass (23kt Gold) | 28 002 978-09 |
|  | Durabrass (23kt Gold) | 28 002 978-09 0010 |
|  | Brushed Durabrass (23kt Gold) | 28 002 978-28 |
|  | Brushed Durabrass (23kt Gold) | 28 002 978-28 0010 |
|  | Brushed Dark Brass | 28 002 978-39 |
|  | Brushed Dark Brass | 28 002 978-39 0010 |
|  | Brushed Chrome | 28 002 978-93 |
|  | Brushed Chrome | 28 002 978-93 0010 |
|  | Brushed Dark Platinum | 28 002 978-99 |
|  | Brushed Dark Platinum | 28 002 978-99 0010 |



| Codes & Standards | | | |
|-------------------|-----------|------------|--|
| ASME A112.18.1 | cUPC | DIN 4109 | EPA WaterSense |
| ISO 3822 | Ü-Zeichen | WaterSense |  |

| Certificates and sustainability | | |
|---------------------------------|-------------|--------------|
| LGA_18 | IAPMO_11777 | IAPMO_4976 (|

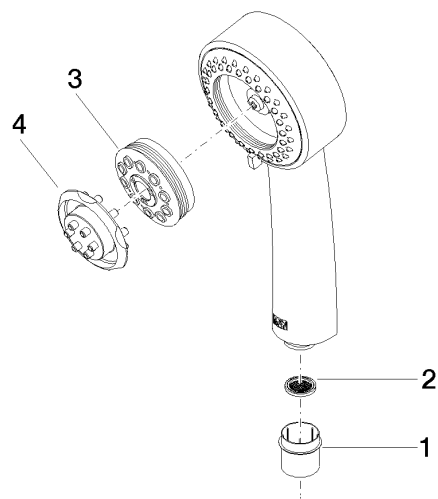

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|--------|---------------|---------------|
| 1 | 09 21 02 115 90 | cap | 1.00 | 2 |
| 4 | 09 30 09 022 90 | key | 1.00 | 2 |
| 3 | 04 12 11 071 00 90 | shower | 1.00 | 2 |
| 2 | 09 23 01 039 90 | sieve | 1.00 | 2 |