


Rain shower for surface-mounted ceiling installation 300 mm - Brushed
Durabrass (23kt Gold)

28 031 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- WRAS

	Brushed Durabrass (23kt Gold)	28 031 970-28
	Chrome	28 031 970-00
	Brushed Platinum	28 031 970-06
	Platinum	28 031 970-08
	Dark Chrome	28 031 970-19
	Light Gold	28 031 970-26
	Brushed Light Gold	28 031 970-27
	Matte Black	28 031 970-33
	Brushed Bronze	28 031 970-42
	Brushed Champagne (22kt Gold)	28 031 970-46
	Champagne (22kt Gold)	28 031 970-47
	Brushed Chrome	28 031 970-93
	Brushed Dark Platinum	28 031 970-99

Required miscellaneous




- Concealed ceiling installation box**
35 041 970 90


with ceiling fixing -
 - min. recess depth mm
 - max. recess depth mm
 - 2x female thread " outlet
 - concealed rough parts

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Durabron (23kt Gold)

28 031 970 Product version from 5/1/2022
mm [inches]

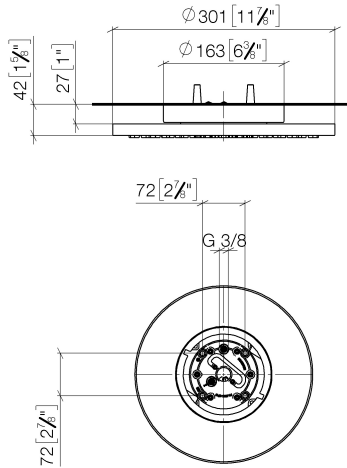

Flow rate chart

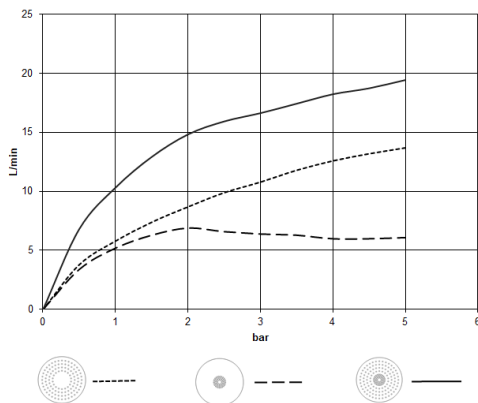

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for surface-mounted ceiling installation 300 mm - Brushed Durabronz (23kt Gold)

28 031 970 Product version from 5/1/2022

Certificates

LGA_38

WRAS_240502

Rain shower for surface-mounted ceiling installation 300 mm - Brushed
Durabrass (23kt Gold)

28 031 970
Product version from 5/1/2022



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2