

**Rain shower for surface-mounted ceiling installation 300 mm - Brushed  
Champagne (22kt Gold)**

28 031 970    Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- WRAS

	Brushed Champagne (22kt Gold)	28 031 970-46
	Chrome	28 031 970-00
	Brushed Platinum	28 031 970-06
	Platinum	28 031 970-08
	Dark Chrome	28 031 970-19
	Light Gold	28 031 970-26
	Brushed Light Gold	28 031 970-27
	Brushed Durabronze (23kt Gold)	28 031 970-28
	Matte Black	28 031 970-33
	Brushed Bronze	28 031 970-42
	Champagne (22kt Gold)	28 031 970-47
	Brushed Chrome	28 031 970-93
	Brushed Dark Platinum	28 031 970-99


**Required miscellaneous**




- Concealed ceiling installation box    35 041 970 90  
with ceiling fixing -**
- concealed rough parts
  - min. recess depth mm
  - max. recess depth mm
  - 2x female thread " outlet

## Rain shower for surface-mounted ceiling installation 300 mm - Brushed Champagne (22kt Gold)

28 031 970 Product version from 5/1/2022  
mm [inches]

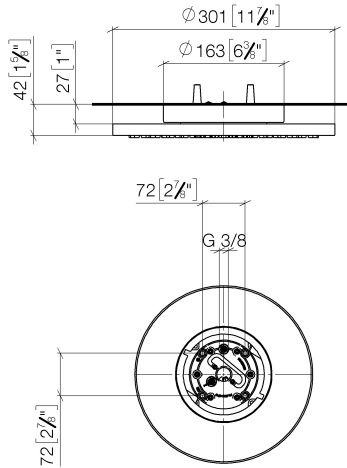

Flow rate chart

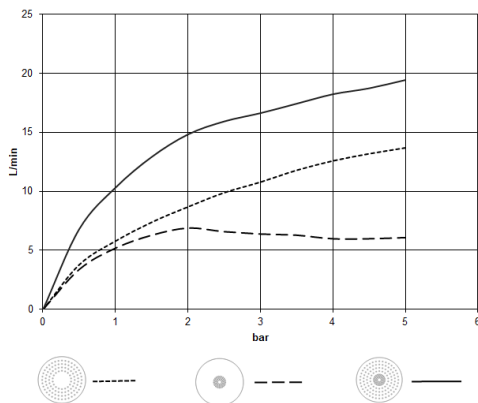

### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Rain shower for surface-mounted ceiling installation 300 mm - Brushed Champagne (22kt Gold)

---

28 031 970 Product version from 5/1/2022

### Certificates


---

LGA\_38

WRAS\_240502

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Champagne (22kt Gold)

28 031 970
Product version from 5/1/2022

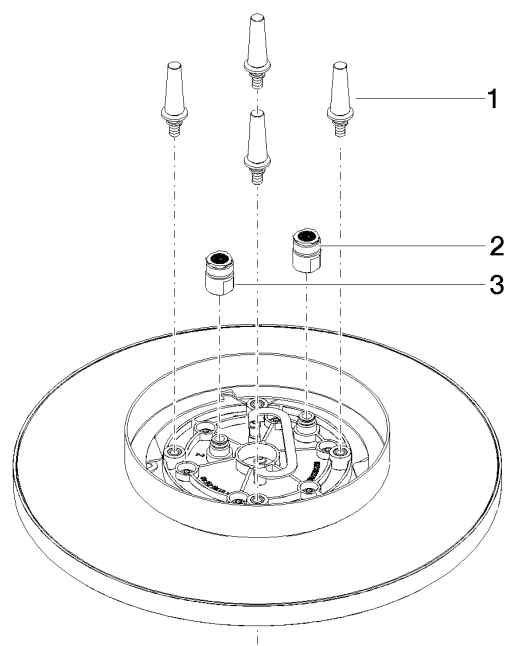

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2