















Rain shower with ceiling fixing 220 mm - Dark Chrome

SERIES SPECIFIC

28 669 970



- rain shower Ø 220 mm
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- Function from: 7 l/min
- rosette Ø 60 mm optional
- 1/2" connection
- with anti-scale system
- quick clearing
- WRAS

| | | |
|---|-------------------------------------|---------------|
|  | Dark Chrome | 28 669 970-19 |
|  | Chrome | 28 669 970-00 |
|  | Brushed Platinum | 28 669 970-06 |
|  | Platinum | 28 669 970-08 |
|  | Light Gold | 28 669 970-26 |
|  | Brushed Light Gold | 28 669 970-27 |
|  | Brushed Durabrass (23kt Gold) | 28 669 970-28 |
|  | Matte Black | 28 669 970-33 |
|  | Brushed Dark Brass | 28 669 970-39 |
|  | Brushed Bronze | 28 669 970-42 |
|  | Brushed Champagne (22kt Gold) | 28 669 970-46 |
|  | Champagne (22kt Gold) | 28 669 970-47 |
|  | Brushed Chrome | 28 669 970-93 |
|  | Brushed Dark Platinum | 28 669 970-99 |

Recommended miscellaneous

Concealed wall elbow -


35 085 970 90




- max. recess depth 163 mm
- min. recess depth 90 mm

28 669 970

mm [inches]



Flow rate chart

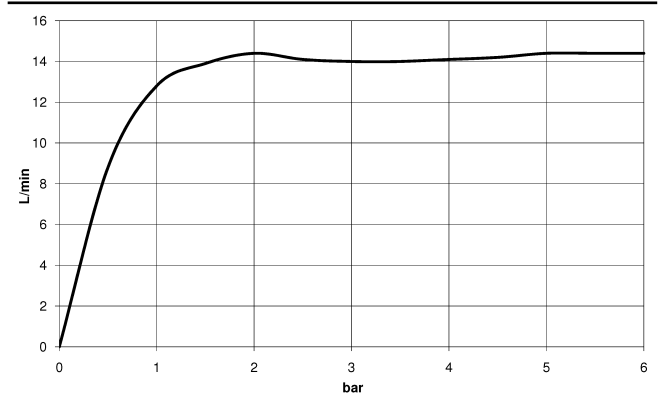

Codes & Standards

| | | | |
|-----------------------------|-----------|----------|------------------------|
| DIN 4109 | EN 1112 | ISO 3822 | Scottish Water Byelaws |
| UK Water Supply Regulations | Ü-Zeichen | | |



Rain shower with ceiling fixing 220 mm - Dark Chrome

SERIES SPECIFIC

28 669 970

Certificates and sustainability

| | | |
|-----------|-----------------|--------|
| WRAS_2212 | DVGW_DW-6517DN0 | LGA_38 |
|-----------|-----------------|--------|

28 669 970

