




33 845 110




- 237mm projection
  - pivotable spout 120°
  - air-enriched flow and spray flow
  - fabric braided hose 1500 mm
  - max. flow 8.8 l/min at 3 bar flow pressure
- Intrinsic protection against back flow.


	Brushed Nickel	33 845 110-70
	Chrome	33 845 110-00
	Soft Black	33 845 110-69

33 845 110

mm [inches]

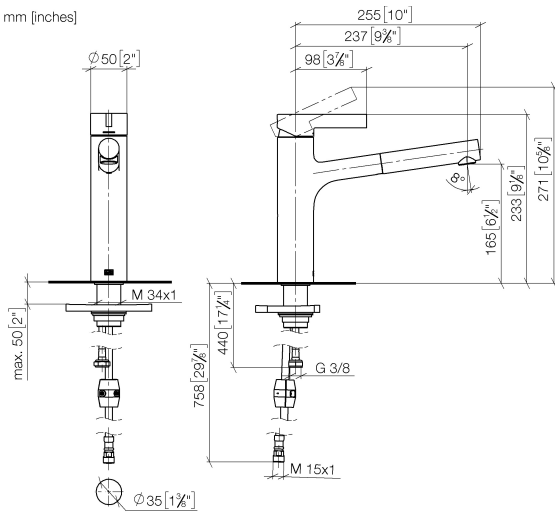

### Flow rate chart

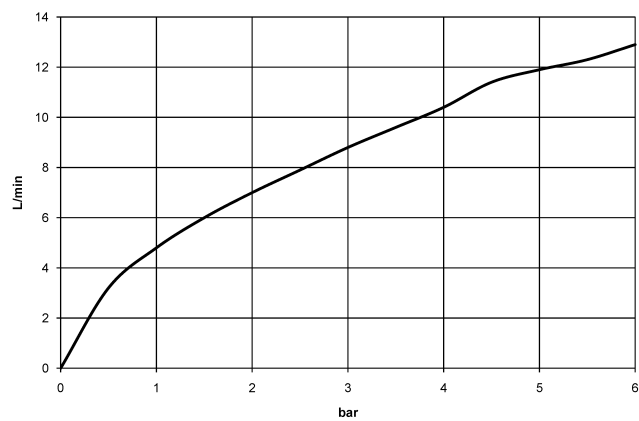

## Codes & Standards

DIN 4109

EN 1717

EN 817

ISO 3822

## Ü-Zeichen

XP P 41-280



DORNBRAUCH LYV Single-lever mixer Pull-out - Brushed Nickel

DORNBRAUCH  
LYV


33 845 110

Certificates and sustainability

Belgaqua_23-012-2	ACS_23 ACC NY	AbP_10	DVGW_DW-6506DN0
-------------------	---------------	--------	-----------------

33 845 110

Parts for other  
finishes can be found  
here: [Chrome](#)

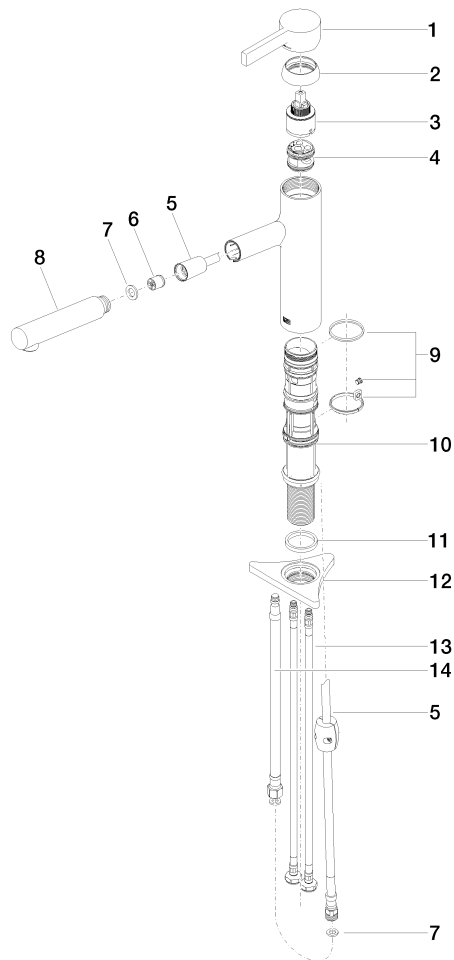

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	90 18 40 227 00 90	insert	1.00	2
10	90 30 01 211 00 90	shaft	1.00	2
1	90 20 81 001 00-70	handle	1.00	2
7	90 14 05 081 00 90	seal	1.00	2
14	90 30 04 110 00 90	hose	1.00	2
9	90 14 15 062 00 90	gasket kit	1.00	2
3	90 15 05 067 00 90	cartridge	1.00	2
11	90 14 05 080 00 90	seal	1.00	2
2	90 28 30 010 00-70	cover	1.00	2
5	90 30 02 101 00 90	hose	1.00	2
13	04 30 04 100 00 90	hose	2.00	2
8	90 12 11 180 00-70	shower	1.00	2
12	90 23 10 003 00 90	fixing set	1.00	2
6	90 23 01 051 00 90	flow reducer	1.00	2