

SYNC Single-lever mixer Pull-down with spray function - Matte Black

SYNC

33 870 895


Product version from 11/1/2024




- 240mm projection
  - pivotable spout 360°
  - Optional swivel limiter available with swivel limiter set 12 821 970 90
  - laminar and spray flow
  - height of mixer 444 mm
  - height up to laminar flow regulator 240 mm
  - hole diameter 35 mm
  - 1800 mm metal shower hose
  - sprayface with anti-scaling system
  - max. flow 10.4 l/min at 3 bar flow pressure
  - lead-free
  - Flow modes can be changed while the water is running
  - This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Intrinsic protection against back flow.

	Matte Black	33 870 895-33
	Chrome	33 870 895-00
	Brushed Platinum	33 870 895-06
	Platinum	33 870 895-08
	Durabrass (23kt Gold)	33 870 895-09
	Dark Chrome	33 870 895-19
	Brushed Durabrass (23kt Gold)	33 870 895-28
	Brushed Bronze	33 870 895-42
	Brushed Champagne (22kt Gold)	33 870 895-46
	Champagne (22kt Gold)	33 870 895-47
	Brushed Chrome	33 870 895-93
	Brushed Dark Platinum	33 870 895-99

Recommended miscellaneous

	Swivel limitation set -	12 821 970 90
---	-------------------------	---------------


Recommended miscellaneous

	Strainer waste with control handle - Matte Black	10 712 970-33
---	--	---------------


Recommended miscellaneous

	Dispenser without rosette - Matte Black	82 424 970-33
---	---	---------------


Recommended miscellaneous

	Dispenser without rosette - Matte Black	82 424 970-33
---	---	---------------


Recommended miscellaneous

	Strainer waste with control handle - Matte Black	10 712 970-33
---	--	---------------

33 870 895 Product version from 11/1/2024

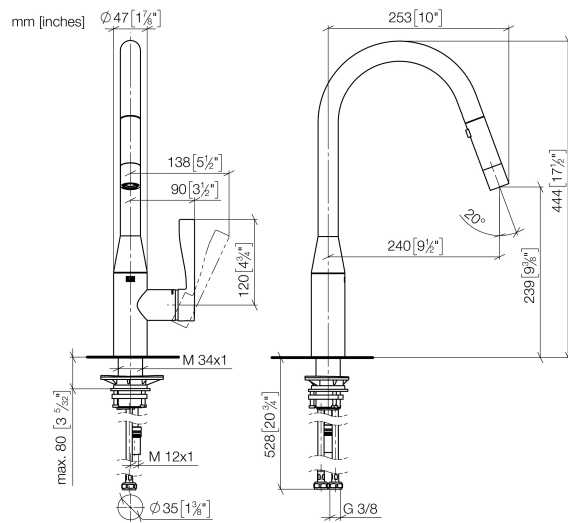

Flow rate chart

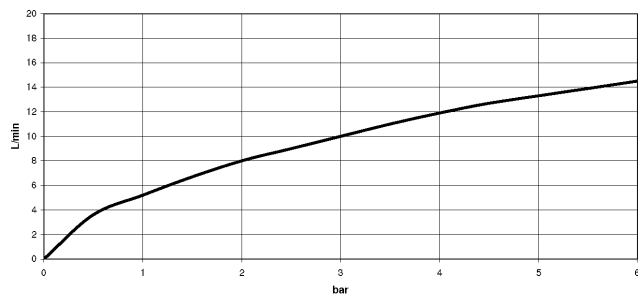

## Codes & Standards

DIN 4109

Executive Order  
no. 1007

ISO 3822

Ü-Zeichen



## SYNC Single-lever mixer Pull-down with spray function - Matte Black

SYNC

33 870 895 Product version from 11/1/2024

Certificates and sustainability

LGA\_28

GDV\_0400

