






DORNBRACHT PIUR Single-lever mixer Pull-out - Brushed Nickel

33 950 210




- 204mm projection
 - pivotable spout 360°
 - air-enriched flow
 - max. flow 8 l/min at 3 bar flow pressure
 - fabric braided hose 1500 mm
- Intrinsic protection against back flow.


	Brushed Nickel	33 950 210-70
	Chrome	33 950 210-00
	Soft Black	33 950 210-69

DORNBRAUCHT PIUR Single-lever mixer Pull-out - Brushed Nickel

33 950 210

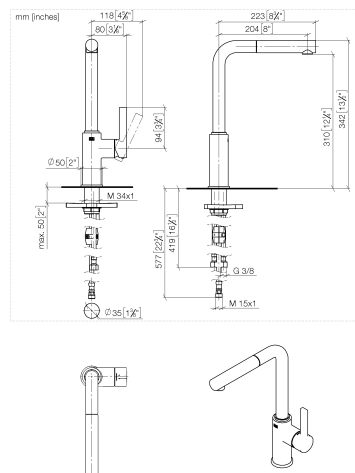

Flow rate chart

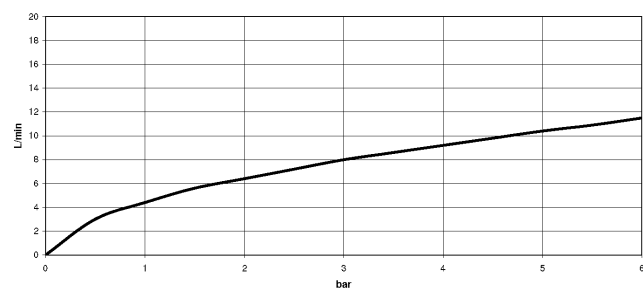

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Ü-Zeichen

XP P 41-280



DORNBRACHT PIUR Single-lever mixer Pull-out - Brushed Nickel

33 950 210


Certificates

Belgaqua_23-012-2 ACS_23 ACC NY AbP_10

DORNBRAUCH PIUR Single-lever mixer Pull-out - Brushed Nickel

33 950 210

Parts for other
finishes can be found
here: [Chrome](#)

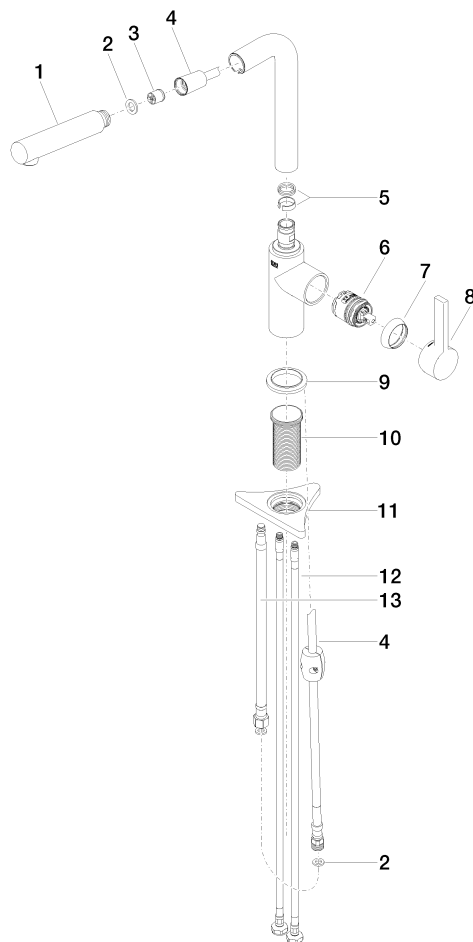

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 12 11 180 00-70	shower	1	2
2	90 14 05 081 00 90	seal	1	2
3	90 23 01 051 00 90	flow reducer	1	2
4	90 30 02 101 00 90	hose	1	2
5	90 14 15 060 00 90	gasket kit	1	2
6	90 15 05 060 00 90	cartridge	1	2
7	90 28 30 011 00-70	cover	1	2
8	90 20 21 001 00-70	handle	1	2
9	90 27 21 001 00-70	rosette	1	2
10	90 30 01 200 00 90	shaft	1	2
11	90 23 10 003 00 90	fixing set	1	2
12	04 30 04 101 00 90	hose	2	2
13	90 30 04 110 00 90	hose	1	2