

xTOOL Concealed thermostat module without volume control -


35 503 970 90

Product version from 1/1/2022




- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 2x female thread 3/4" outlet for additional valves
- dust cover
- anti-water packing
- soundproofing
- suitable for xGRID (when using installation track + 12 mm recess depth)


Recommended miscellaneous

	Extension 28 mm -	12 177 970 90


Recommended miscellaneous

	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
---	--	---------------

Recommended miscellaneous

	Extension 46 mm -	12 178 970 90


Required miscellaneous

	xGRID Installation track 555 mm -	12 360 970 90
--	--	---------------



xTOOL Concealed thermostat module without volume control -

35 503 970 90 Product version from 1/1/2022

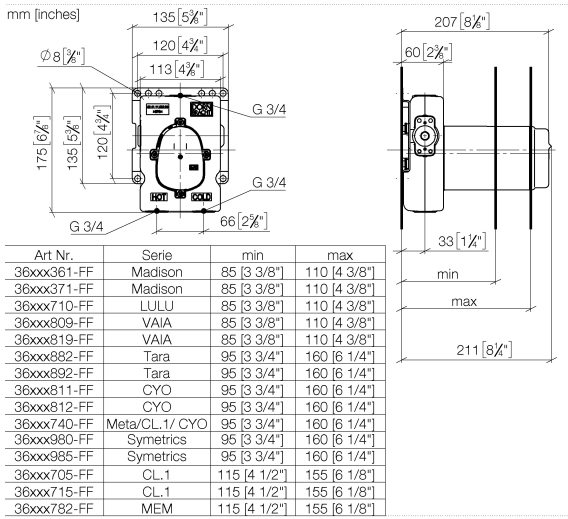

Codes & Standards


EN 1111 EN 1717 XP P 41-280

Certificates

Belgaqua_21-031-2 ACS_21 ACC LY DVGW_DW-6512DN0

xTOOL Concealed thermostat module without volume control -

35 503 970 90 Product version from 1/1/2022

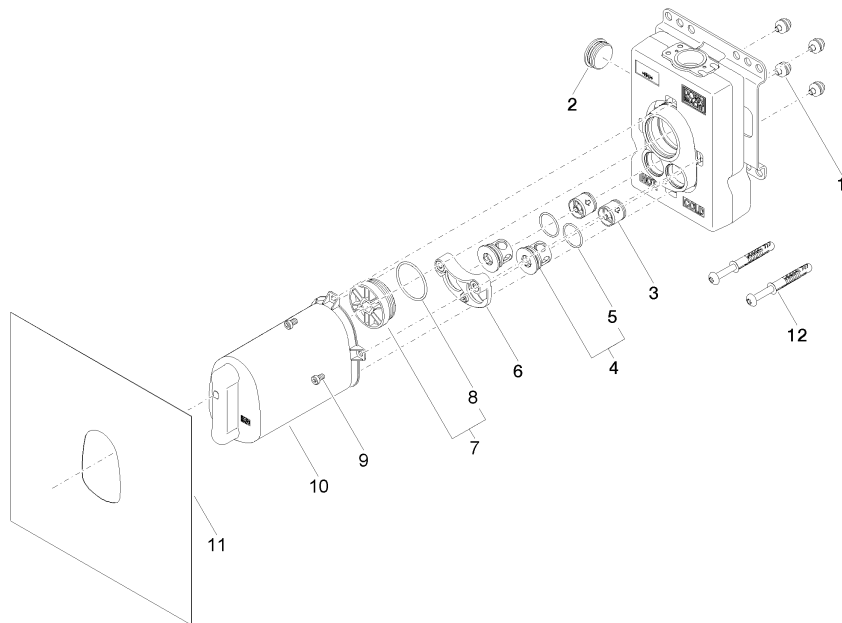

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 23 01 091 00 90	set	4	2
2	09 31 20 003 90	plug	1	2
3	90 23 01 045 00 90	back-flow preventer	2	2
4	04 21 34 077 00 90	nipple	2	2
5	09 14 10 098 90	seal	2	2
6	90 12 12 218 00 90	base	1	2
7	04 31 20 100 00 90	plug	1	2
8	09 14 10 111 90	seal	1	2
9	09 30 30 112 90	screw	3	2
10	04 21 02 174 01 90	cap	1	2
11	04 14 03 073 04 90	gasket kit	1	2
12	04 30 31 054 00 90	fixing set	1	2