

MADISON xTOOL Concealed thermostat without volume control 3/4" - Chrome







MADISON

36 503 977


Product version up to 1/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Chrome	36 503 977-00
	Brushed Platinum	36 503 977-06
	Platinum	36 503 977-08
	Durabrand (23kt Gold)	36 503 977-09
	Brushed Durabrand (23kt Gold)	36 503 977-28
	Brushed Dark Platinum	36 503 977-99


Required miscellaneous

	<b>xTOOL Concealed thermostat module without volume control -</b> • max. recess depth 110 mm • min. recess depth 85 mm	35 503 970 90
---	--	---------------

Required miscellaneous


	<b>xGRID Installation track 555 mm -</b>	12 360 970 90
---	--	---------------

Recommended miscellaneous


	<b>xGRID Attachment set for integrating in the dry wall construction -</b>	12 340 970 90
---	--	---------------

36 503 977 Product version up to 1/1/2022

mm [inches]

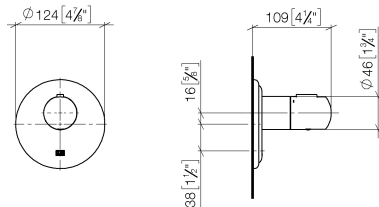

### Flow rate chart

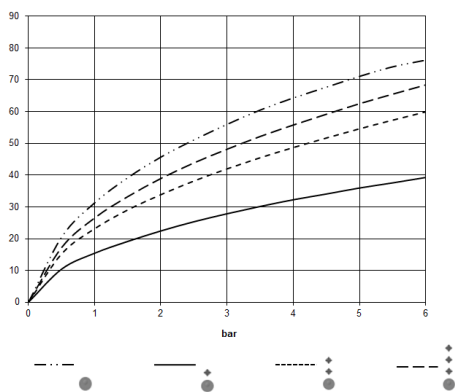

### Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen




MADISON xTOOL Concealed thermostat without volume control 3/4" - Chrome

MADISON

36 503 977    Product version up to 1/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW-6512DN0	LGA_29	LGA_29
-----------	-----------------	--------	--------

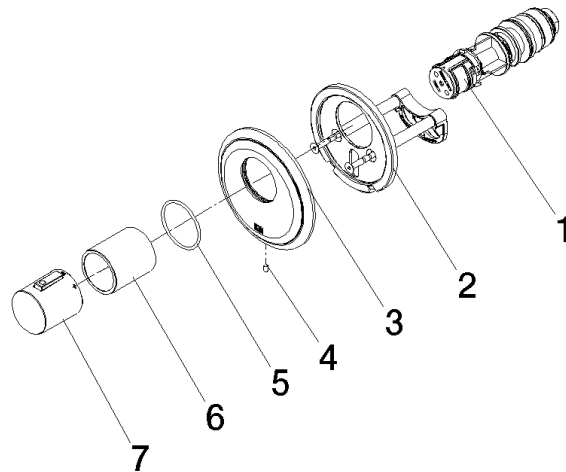

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	09 31 11 048 90	pin	1.00	2
2	90 11 01 196 00 90	base	1.00	2
3	09 11 02 543-00	cover	1.00	10
6	90 21 02 112 00-00	sleeve	1.00	10
7	90 17 33 005 01-00	handle	1.00	10
5	90 14 10 049 00 90	seal	1.00	2
1	90 15 02 063 00 90	cartridge	1.00	2