

## xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 979 Product version from 9/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Light Gold	36 503 979-27
	Chrome	36 503 979-00
	Brushed Platinum	36 503 979-06
	Platinum	36 503 979-08
	Durabrass (23kt Gold)	36 503 979-09
	Dark Chrome	36 503 979-19
	Light Gold	36 503 979-26
	Brushed Durabrass (23kt Gold)	36 503 979-28
	Matte Black	36 503 979-33
	Brushed Dark Brass	36 503 979-39
	Brushed Bronze	36 503 979-42
	Brushed Champagne (22kt Gold)	36 503 979-46
	Champagne (22kt Gold)	36 503 979-47
	Brushed Chrome	36 503 979-93
	Brushed Dark Platinum	36 503 979-99

### Required miscellaneous



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 • min. recess depth 95 mm  
 • max. recess depth 160 mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

### Required miscellaneous



**xGRID Installation track 555 mm -** 12 360 970 90


xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold

SERIES SPECIFIC

36 503 979

Product version from 9/1/2022

mm [inches]

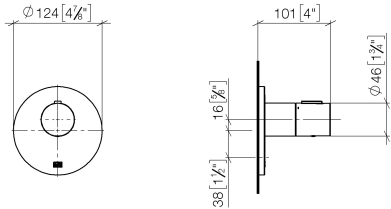

Flow rate chart



Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



**xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold    SERIES SPECIFIC**

---

36 503 979    Product version from 9/1/2022

**Certificates and sustainability**

---

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

**xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC**

36 503 979 Product version from 9/1/2022

