

MEM Bath shower set for bath rim or tile edge installation - Dark Chrome

MEM

27 532 782



- 220mm projection
- spout: rectangular normal flow
- max. flow 27.3 l/min at 3 bar flow pressure
- Hand shower: COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- complete hand shower set with anti-scale system
- automatic bath/shower diverter
- height of mixer 300 mm
- height up to aerator 170 mm
- hole diameter valve 32 mm
- hole diameter spout 32 mm
- hole diameter for complete hand shower set 32 mm
- rosette for spout 60 x 60mm
- rosette for complete hand shower set 60 x 60mm
- rosette for deck valve 60 x 60mm
- metal shower hose 1750mm with integrated anti-twist protection
- WRAS

Intrinsic protection against back flow.

	Dark Chrome	27 532 782-19
	Chrome	27 532 782-00
	Brushed Platinum	27 532 782-06
	Platinum	27 532 782-08
	Brushed Durabronze (23kt Gold)	27 532 782-28
	Brushed Dark Brass	27 532 782-39
	Brushed Champagne (22kt Gold)	27 532 782-46
	Champagne (22kt Gold)	27 532 782-47
	Brushed Dark Platinum	27 532 782-99

Recommended miscellaneous



Perfecto installation kit -

12 614 970 90

Recommended miscellaneous




Decorative caps for Perfecto - Dark Chrome

• 1 pair

12 801 970-19

The technical drawing includes two views of the mounting bracket assembly:

- Side View (Left):** Shows the vertical profile of the bracket. Key dimensions include:
 - Total height: 42 [1 5/8"]
 - Maximum depth from wall: max. 40 [1 5/8"]
 - Vertical offset between mounting points: G 1/2
 - Horizontal distance between mounting points: G 1/2
 - Mounting hole diameter: Ø 32 [1 1/4"]
 - Bracket thickness: 60 [2 3/8"]
 - Screw specifications: M 30x1,5 and M 32x1,5
 - Bottom hole diameter: Ø 32 [1 1/4"]
- Top View (Right):** Shows the horizontal profile of the bracket. Key dimensions include:
 - Total width: 234 [9 1/4"]
 - Height from wall to top of bracket: 26 [1"]
 - Radius of the curved section: R 117
 - Distance from wall to start of curve: 220 [8 5/8"]
 - Angle of the bracket arm: 170 [6°]
 - Mounting hole diameter: Ø 32 [1 1/4"]
 - Offset dimension: G 3/8

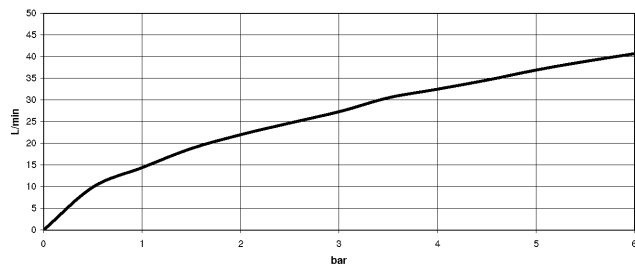

ASME A112.18.1	cUPC	DIN 4109	ISO 3822
Scottish Water Byelaws	UK Water Supply Regulations	Ü-Zeichen	



MEM Bath shower set for bath rim or tile edge installation - Dark Chrome

MEM

27 532 782

Certificates and sustainability

WRAS_2306	IAPMO_4976	LGA_9
-----------	------------	-------

27 532 782

