

Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Dark Platinum

28 032 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system

Ceiling module power supply

• 350mA (CC)

Spot lighting

- LED colour temperature approx. 3000 K
- Bulbs protected against splashing water
- Contains energy efficiency class bulbs
- Technology: LED, not dimmable
- Provided by customer: Light switch

Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- WRAS

| Brushed Dark Platinum | 28 032 970-99 |
|-------------------------------------|---------------|
| Chrome | 28 032 970-00 |
| Brushed Platinum | 28 032 970-06 |
| Platinum | 28 032 970-08 |
| Dark Chrome | 28 032 970-19 |
| Light Gold | 28 032 970-26 |
| Brushed Light Gold | 28 032 970-27 |
| Brushed Durabrass (23kt Gold) | 28 032 970-28 |
| Matte Black | 28 032 970-33 |
| Brushed Bronze | 28 032 970-42 |
| Brushed Champagne (22kt Gold) | 28 032 970-46 |
| Champagne (22kt Gold) | 28 032 970-47 |
| Brushed Chrome | 28 032 970-93 |

Required miscellaneous




Concealed ceiling installation box 35 042 970 90 for surface-mounted ceiling installation with light -


- •min. recess depth mm
- •max. recess depth mm
- •2x female thread 1/2" connections
- •Input 100-240V AC 50-60Hz
- •concealed rough parts
- •Output 350 mA SELV / Class 2
- •Provided by customer: Light switch



Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Dark Platinum



Flow rate chart



Codes & Standards

DIN 4109 ISO 3822 Scottish Water UK Water Supply Byelaws Regulations

Ü-Zeichen



Rain shower for surface-mounted ceiling installation with light 300 mm -Brushed Dark Platinum


28 032 970 Product version from 5/1/2022 Certificates

WRAS_240502 LGA_38



Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Dark Platinum

28 032 970 Product version from 5/1/2022

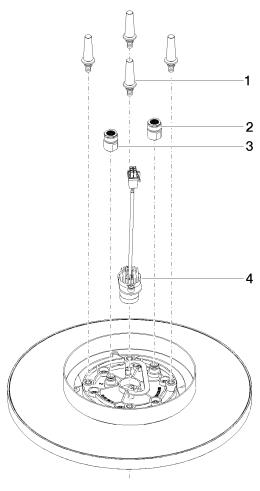

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1 | 90 17 20 263 00 90 | fixing set | 1 | 2 |
| 2 | 90 24 03 309 01 90 | connection | 1 | 2 |
| 3 | 90 24 03 309 00 90 | connection | 1 | 2 |
| 4 | 90 10 01 225 00 90 | electronic accessories | 1 | 2 |