












Rain shower for surface-mounted ceiling installation 300 x 240 mm - Matte Black
SERIES SPECIFIC

28 041 980	Product version from 5/1/2022		
	<ul style="list-style-type: none"> rain shower 300 x 240mm PURE RAIN, max. flow rate 12 l/min (at 3 bar) PURIFY RAIN, max. flow rate 6 l/min (at 3 bar) with anti-scale system 	<div>  Matte Black </div>	28 041 980-33
	Technical data:	<div>  Chrome </div>	28 041 980-00
	<ul style="list-style-type: none"> Distance to ceiling from bottom edge of shower 40 mm 	<div>  Brushed Platinum </div>	28 041 980-06
	Planning tips:	<div>  Platinum </div>	28 041 980-08
	<ul style="list-style-type: none"> For simultaneous control of the jet types, we recommend the xTool thermostat module Not suitable for use in a steam room. WRAS 	<div>  Brushed Durabronze (23kt Gold) </div>	28 041 980-28
		<div>  Brushed Champagne (22kt Gold) </div>	28 041 980-46
		<div>  Champagne (22kt Gold) </div>	28 041 980-47
		<div>  Brushed Chrome </div>	28 041 980-93
		<div>  Brushed Dark Platinum </div>	28 041 980-99


Required miscellaneous

	Concealed ceiling installation box with ceiling fixing -	35 041 970 90
	<ul style="list-style-type: none"> min. recess depth 90 mm max. recess depth 115 mm 2x female thread 1/2" outlet concealed rough parts 	


Rain shower for surface-mounted ceiling installation 300 x 240 mm - Matte Black

SERIES SPECIFIC

28 041 980 Product version from 5/1/2022
mm [inches]

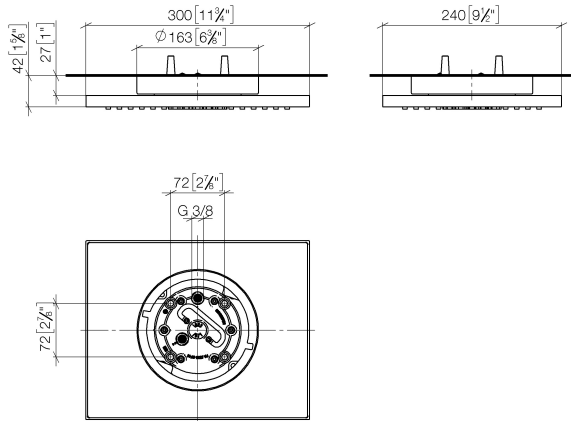

Flow rate chart

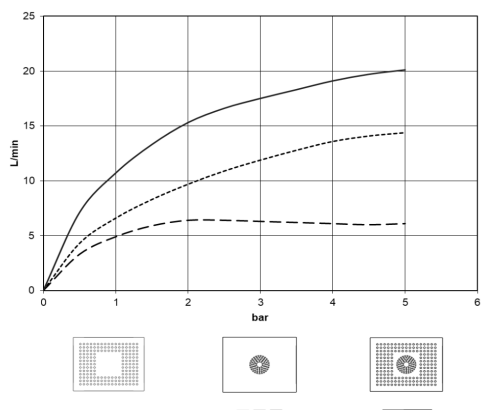

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for surface-mounted ceiling installation 300 x 240 mm - Matte Black


SERIES SPECIFIC

28 041 980 Product version from 5/1/2022

Certificates and sustainability

LGA_38

WRAS_240502

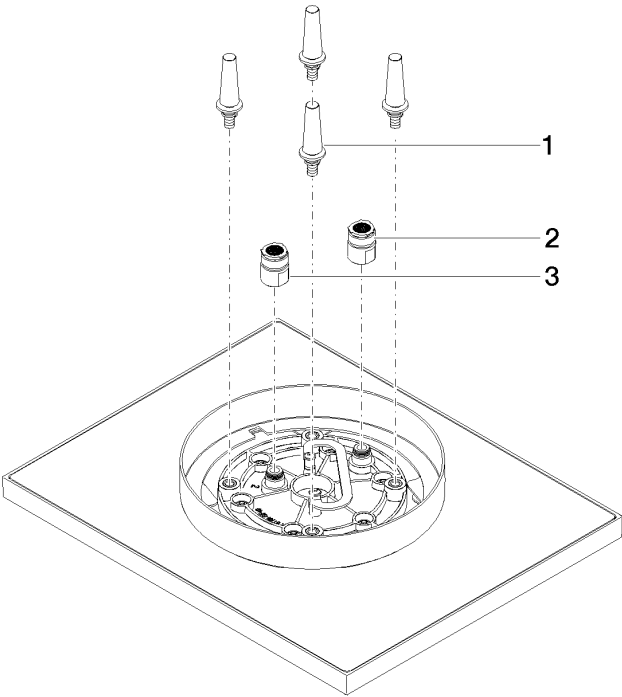

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1.00	2
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2