







28 508 360



- 200mm projection
- ball-joint pivotable through 30°
- Three settings: PURIFY RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate 9 l/min (at 3 bar)
- Function from: 7 l/min
- with anti-scale system
- spray head Ø 94mm
- rosette Ø 55 mm
- 1/2" connection

| | | |
|---|------------------------------|--------------------|
|  | Chrome | 28 508 360-00 |
|  | Chrome | 28 508 360-00 0010 |
|  | Brushed Platinum | 28 508 360-06 0010 |
|  | Brushed Platinum | 28 508 360-06 |
|  | Platinum | 28 508 360-08 0010 |
|  | Platinum | 28 508 360-08 |
|  | Durabass (23kt Gold) | 28 508 360-09 0010 |
|  | Durabass (23kt Gold) | 28 508 360-09 |
|  | Brushed Durabass (23kt Gold) | 28 508 360-28 0010 |
|  | Brushed Durabass (23kt Gold) | 28 508 360-28 |
|  | Brushed Dark Platinum | 28 508 360-99 0010 |
|  | Brushed Dark Platinum | 28 508 360-99 |


Recommended miscellaneous

- Concealed wall elbow -** 35 085 970 90
- max. recess depth 163 mm
 - min. recess depth 90 mm



28 508 360


mm [inches]

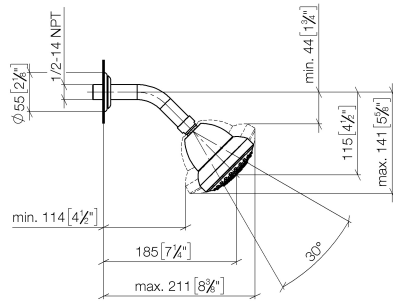

Flow rate chart



28 508 360

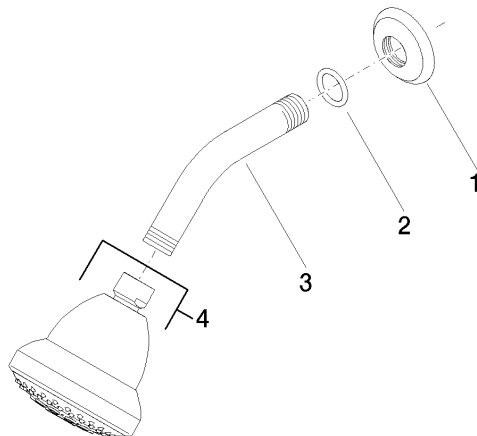

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------|---------------|---------------|
| 1 | 09 27 35 003-00 | rosette | 1 | 10 |
| 2 | 90 14 10 026 00 90 | seal | 1 | 2 |
| 3 | 09 11 03 011-00 | connection | 1 | 10 |
| 4 | 04 12 11 120 00-00 | shower | 1 | 10 |