










VAIA Concealed two-way diverter - Brushed Bronze

VAIA


36 200 819



- rotary diverter
- rosette Ø 60 mm
- WRAS


	Brushed Bronze	36 200 819-42
	Chrome	36 200 819-00
	Brushed Platinum	36 200 819-06
	Dark Chrome	36 200 819-19
	Brushed Durabrass (23kt Gold)	36 200 819-28
	Brushed Dark Brass	36 200 819-39
	Brushed Champagne (22kt Gold)	36 200 819-46
	Champagne (22kt Gold)	36 200 819-47
	Brushed Dark Platinum	36 200 819-99

Required miscellaneous


	Concealed two-way diverter - •min. recess depth 85 mm •max. recess depth 160 mm	35 202 970 90
-------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------	---------------

36 200 819

mm [inches]



Flow rate chart

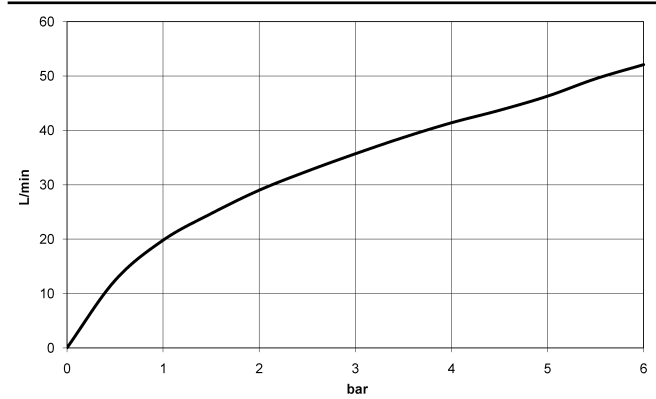

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



VAIA Concealed two-way diverter - Brushed Bronze

VAIA

36 200 819

Certificates and sustainability

LGA_38

WRAS_2307

36 200 819

