





Concealed thermostat with one function volume control - Dark Chrome

SERIES SPECIFIC

36 425 970



- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

| | | |
|---|--------------------------------|---------------|
|  | Dark Chrome | 36 425 970-19 |
|  | Chrome | 36 425 970-00 |
|  | Brushed Platinum | 36 425 970-06 |
|  | Platinum | 36 425 970-08 |
|  | Light Gold | 36 425 970-26 |
|  | Brushed Light Gold | 36 425 970-27 |
|  | Brushed Durabronze (23kt Gold) | 36 425 970-28 |
|  | Matte Black | 36 425 970-33 |
|  | Brushed Bronze | 36 425 970-42 |
|  | Brushed Champagne (22kt Gold) | 36 425 970-46 |
|  | Champagne (22kt Gold) | 36 425 970-47 |
|  | Brushed Chrome | 36 425 970-93 |
|  | Brushed Dark Platinum | 36 425 970-99 |

Required miscellaneous



- Concealed thermostat -** 35 425 970 90
- max. recess depth 136 mm
 - min. recess depth 80 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous



- Concealed thermostat with built-in isolators -** 35 426 970 90
- max. recess depth 136 mm
 - min. recess depth 80 mm


Required miscellaneous




- xGRID Installation track 555 mm -** 12 360 970 90

36 425 970

mm [inches]

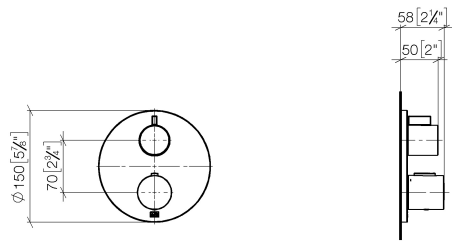

Flow rate chart

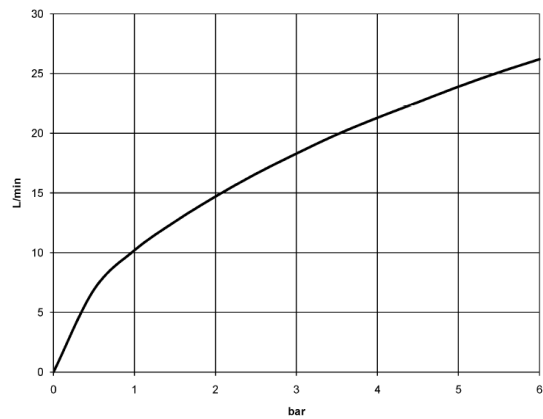

Codes & Standards

| | | | |
|-----------------------------|-----------|------------|------------------------|
| DIN 4109 | EN 1111 | ISO 3822 | Scottish Water Byelaws |
| UK Water Supply Regulations | Ü-Zeichen | VA-Zeichen | |



Concealed thermostat with one function volume control - Dark Chrome

SERIES SPECIFIC

36 425 970

Certificates and sustainability

| | | | | |
|--------|--------|-----------------|--------|-------------|
| LGA_19 | ETA_20 | DVGW_DW-6512DN0 | LGA_19 | WRAS_250402 |
|--------|--------|-----------------|--------|-------------|

36 425 970

