

## xTOOL Concealed thermostat without volume control 1/2" - Dark Chrome

SERIES SPECIFIC

36 501 985



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Dark Chrome	36 501 985-19
	Chrome	36 501 985-00
	Brushed Platinum	36 501 985-06
	Platinum	36 501 985-08
	Brushed Light Gold	36 501 985-27
	Brushed Durabronze (23kt Gold)	36 501 985-28
	Matte Black	36 501 985-33
	Brushed Champagne (22kt Gold)	36 501 985-46
	Champagne (22kt Gold)	36 501 985-47
	Brushed Chrome	36 501 985-93
	Brushed Dark Platinum	36 501 985-99

### Required miscellaneous



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90

- max. recess depth 160 mm
- min. recess depth 95 mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


### Required miscellaneous



**xGRID Installation track 555 mm -** 12 360 970 90

36 501 985

mm [inches]

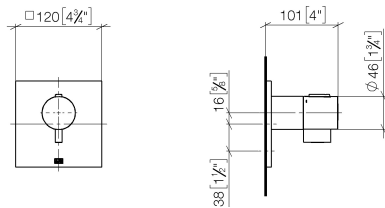

## Flow rate chart



## Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 1/2" - Dark Chrome

SERIES SPECIFIC

36 501 985

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

36 501 985

