


MADISON xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabrand (23kt Gold)







MADISON

36 503 977


Product version up to 1/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Durabrand (23kt Gold)	36 503 977-28
	Chrome	36 503 977-00
	Brushed Platinum	36 503 977-06
	Platinum	36 503 977-08
	Durabrand (23kt Gold)	36 503 977-09
	Brushed Dark Platinum	36 503 977-99


Required miscellaneous



xTOOL Concealed thermostat module without volume control -
 •max. recess depth 110 mm
 •min. recess depth 85 mm

35 503 970 90


Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -

12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm -

12 360 970 90

MADISON xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabronz (23kt Gold)

MADISON

36 503 977 Product version up to 1/1/2022
mm [inches]

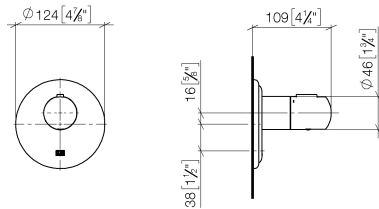

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen




MADISON xTOOL Concealed thermostat without volume control 3/4" - Brushed
Durabrass (23kt Gold)

MADISON

36 503 977 Product version up to 1/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29	LGA_29
-----------	---------------------	--------	--------

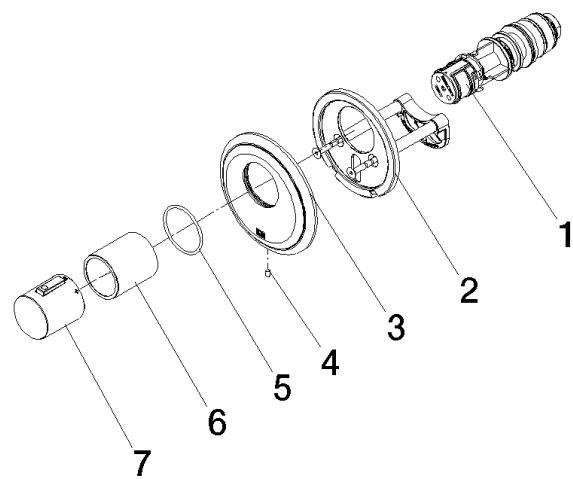

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 11 01 196 00 90	base	1.00	2
3	09 11 02 543-28	cover	1.00	20
4	09 31 11 048 90	pin	1.00	2
5	90 14 10 049 00 90	seal	1.00	2
7	90 17 33 005 01-28	handle	1.00	20
6	90 21 02 112 00-28	sleeve	1.00	20
1	90 15 02 063 00 90	cartridge	1.00	2