

36 503 979



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS 2011026

	Dark Chrome	36 503 979-19
	Chrome	36 503 979-00
	Brushed Platinum	36 503 979-06
	Platinum	36 503 979-08
	Durabress (23kt Gold)	36 503 979-09
	Light Gold	36 503 979-26
	Brushed Light Gold	36 503 979-27
	Brushed Durabress (23kt Gold)	36 503 979-28
	Matte Black	36 503 979-33
	Brushed Bronze	36 503 979-42
	Brushed Champagne (22kt Gold)	36 503 979-46
	Champagne (22kt Gold)	36 503 979-47
	Brushed Chrome	36 503 979-93
	Brushed Dark Platinum	36 503 979-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 •max. recess depth 110 mm  
 •min. recess depth 85 mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


**Required miscellaneous**




**xGRID Installation track 555 mm -** 12 360 970 90

36 503 979

mm [inches]

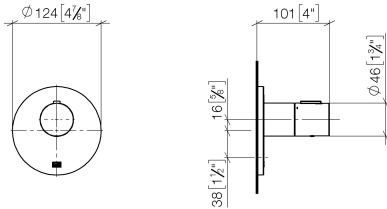

Flow rate chart

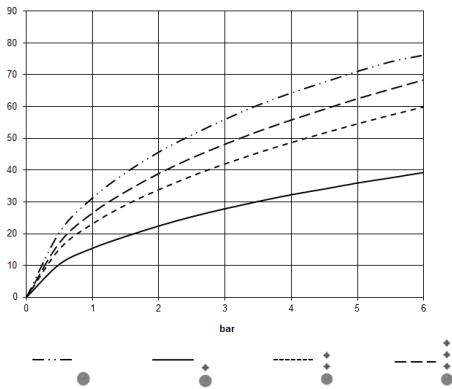

Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



xTOOL Concealed thermostat without volume control 3/4" - Dark Chrome

META

36 503 979


Certificates

LGA\_29

DVGW\_DW-  
6512DN0

WRAS\_2011

36 503 979

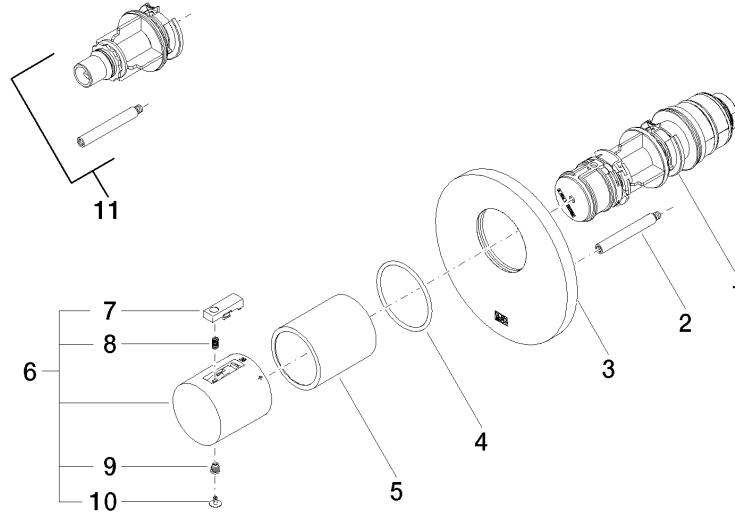



36 503 979

## Spare parts list