

## AQUAMOON Rain panel - Matte White

---

41 620 979



- exposed trim parts
  - Rain panel with 3 different flow modes
  - AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 12 l/min (at 3 bar)
  - TEMPEST RAIN: Natural rain, max. flow rate 10 l/min (at 3 bar)
  - QUEEN'S COLLAR CASCADE: Rounded cascade, max. flow rate 24 l/min (at 3 bar)
  - Indirect mood lighting, warm white LED light strip 2700K
  - Matt white cover, RAL 9003
  - with anti-scale system
  - Outer diameter 1240 mm, opening diameter 450 mm
  - Weight 22.5 kg
  - Protection rating IP67
  - Control elements not included among the items supplied
- Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request**

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

### Required miscellaneous




**AQUAMOON Concealed ceiling installation box -** 35 620 970 90


- Ceiling installation enclosure 1356 x 1356 x 290 mm
- concealed rough parts
- Opening diameter 1252 mm
- min. recess depth 290 mm

**AQUAMOON Rain panel - Matte White**

41 620 979

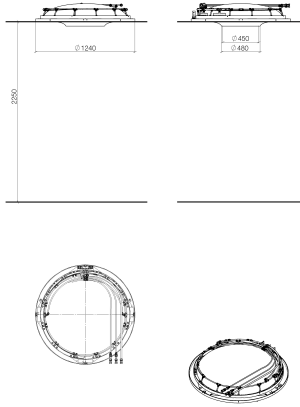

**Flow rate chart**

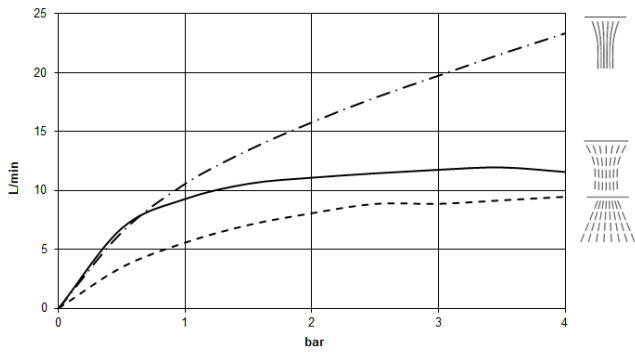

**Codes & Standards**

DIN 4109

ISO 3822

Ü-Zeichen



## AQUAMOON Rain panel - Matte White

---

41 620 979


Certificates

---

LGA\_29

# AQUAMOON Rain panel - Matte White

41 620 979

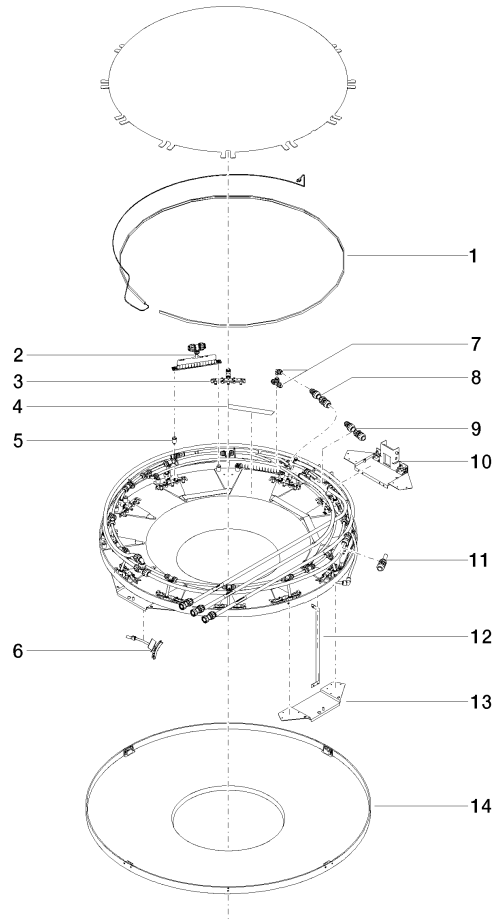



## AQUAMOON Rain panel - Matte White

---

41 620 979

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 10 01 183 00 90	lamp	72	2