

AQUAMOON Rain panel with color light - Matte White

41 625 979



- exposed trim parts
- Rain panel with 3 different flow modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 12 l/min (at 3 bar)
- TEMPEST RAIN: Natural rain, max. flow rate 10 l/min (at 3 bar)
- QUEEN'S COLLAR CASCADE: Rounded cascade, max. flow rate 24 l/min (at 3 bar)
- RGBW LED ambient lighting
- Matt white cover, RAL 9003
- with anti-scale system
- Outer diameter 1240 mm, opening diameter 450 mm
- Flow rate at 3 bar flow pressure in conjunction with xTOOL: 46 l/min
- Weight 22.5 kg
- Protection rating IP67
- Control elements not included among the items supplied
- Provided by customer: Zigbee gateway

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

includes light bulbs with a Class G energy efficiency

Required miscellaneous




AQUAMOON Concealed ceiling installation box with color light - 35 625 970 90

- Ceiling installation enclosure 1356 x 1356 x 290 mm
- concealed rough parts
- Opening diameter 1252 mm
- min. recess depth 290 mm

AQUAMOON Rain panel with color light - Matte White

41 625 979

Flow rate chart

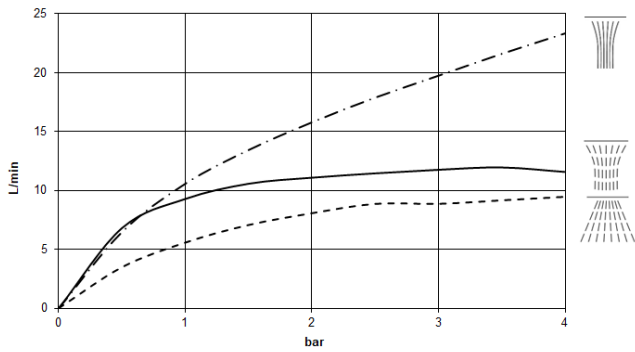

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



AQUAMOON Rain panel with color light - Matte White


41 625 979

Certificates

LGA_29

AQUAMOON Rain panel with color light - Matte White

41 625 979

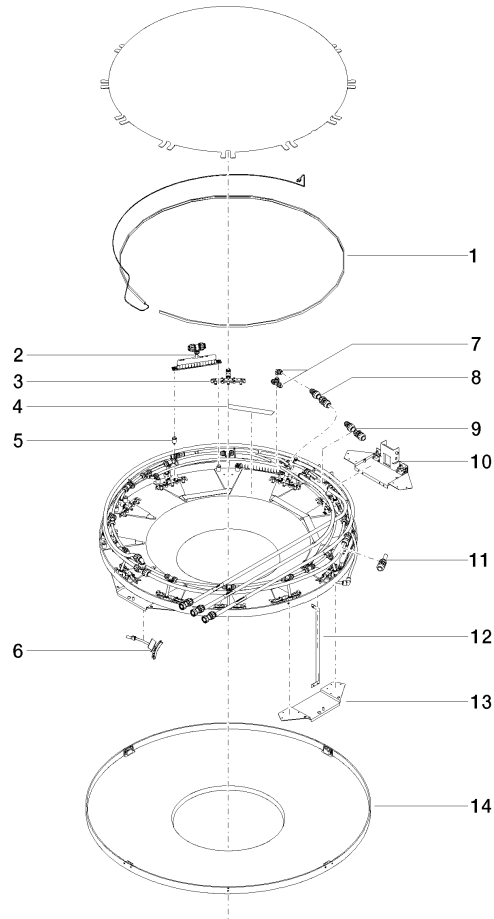



AQUAMOON Rain panel with color light - Matte White

41 625 979

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	90 10 01 183 01 90	lamp	72	2