

SERENITY SKY+ Rain panel for recessed ceiling installation - Brushed
Stainless Steel

SERIES-VARIOUS

41 780 979 Product version from 9/1/2024



- exposed trim parts
- Rain panel with 5 different flow modes
- Rain panel, 600 x 420 mm
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- LAMINAR FLOW, max. flow rate 10 l/min (at 3 bar)
- AQUAPRESSURE FLOW, max. flow rate 9.4 l/min (at 3 bar)
- COOL MIST, max. flow rate 1 l/min (at 3 bar)
- with anti-scale system

Technical data:

- min. recess depth 150 mm
- weight 15kg

technical data:








- Not suitable for use in a steam room.

Sanitary:

- recommended water hardness: 6-7 °dH - if the water is harder, integrate a water softener that uses the ion exchange principle into the feed pipe.
- for choosing the drainage, taking into consideration the discharge of all the products in the shower, the specific demand needs to be assessed.
Recommendation: Floor drain (connected rating) = 1l/sec, drainage rate DN 50
- feed pipe (hot/cold): 2x DN 20
- For the optimum choice of hot water storage device - taking into consideration additional drawing-off points and the frequency with which the rain panels are used - the specific demand needs to be assessed

Notes:

- Recommended control element: xTool

| | | |
|---|-------------------------------|---------------|
|  | Brushed Stainless Steel | 41 780 979-86 |
|  | Chrome | 41 780 979-00 |
|  | Dark Chrome | 41 780 979-19 |
|  | Brushed Bronze | 41 780 979-42 |
|  | Brushed Champagne (22kt Gold) | 41 780 979-46 |
|  | Champagne (22kt Gold) | 41 780 979-47 |
|  | Brushed Dark Platinum | 41 780 979-99 |

Required miscellaneous




SERENITY SKY+ Concealed ceiling installation box - 35 780 970 90

- concealed rough parts
- 5x 1/2" female connector
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- min. recess depth 150 mm
- weight 15kg


SERENITY SKY+ Rain panel for recessed ceiling installation - Brushed
Stainless Steel

SERIES-VARIOUS

41 780 979 Product version from 9/1/2024
mm [inches]
1:10

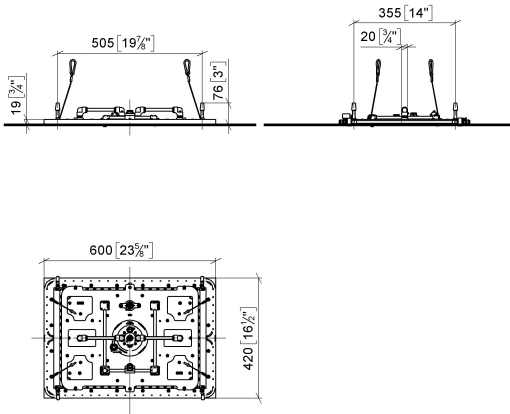

Flow rate chart

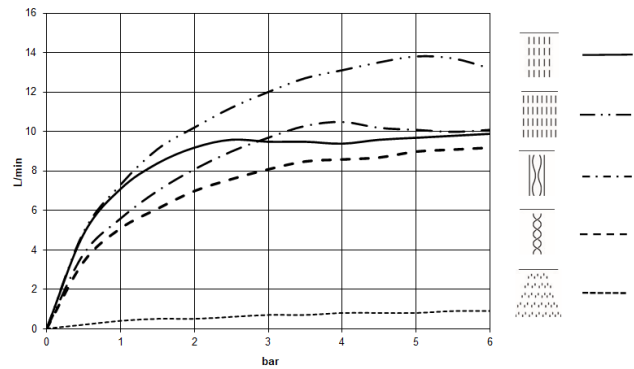

Codes & Standards

| | | | |
|----------|----------|---------------------------|--------------------------------|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |
|----------|----------|---------------------------|--------------------------------|

Ü-Zeichen



SERENITY SKY+ Rain panel for recessed ceiling installation - Brushed Stainless Steel


SERIES-VARIOUS

41 780 979 Product version from 9/1/2024

Certificates and sustainability

LGA_38

WRAS_250102

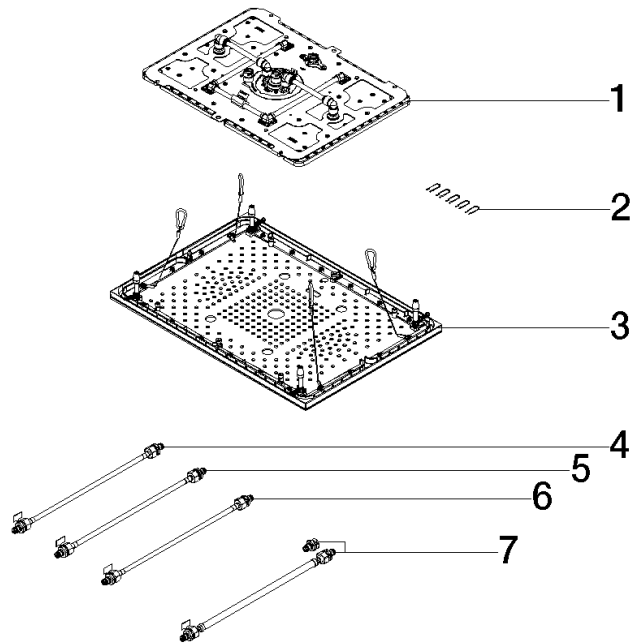

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|--------|---------------|---------------|
| 4 | 90 30 04 096 01 90 | hose | 1.00 | 2 |
| 7 | 90 30 04 033 00 90 | hose | 1.00 | 2 |
| 2 | 91 16 02 053 00 90 | holder | 1.00 | 2 |
| 3 | 90 12 05 106 00-86 | cover | 1.00 | 30 |
| 5 | 90 30 04 096 02 90 | hose | 1.00 | 2 |
| 6 | 90 30 04 096 03 90 | hose | 1.00 | 2 |
| 1 | 90 12 01 095 00 90 | shower | 1.00 | 2 |