


ST 010 203 0740



- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone).

  Cannot be combined with basins that have a closing drain.

  ATTENTION: Separate terms and conditions for

ATTENTION: Separate terms and conditions for electronic articles are applicable.

### Individual components of this set

You need the following components for this set



1x 42 766 970 90

1x

13 800 740-00







ST 010 203 0740



ST 010 203 0740



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
   Cannot be combined with basins in conducting materials (e.g. steel. river stone).
   Cannot be combined with basins that have a closing drain.
   ATTENTION: Separate terms and conditions for

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

#### Required miscellaneous



eSET Touchfree Basin mixer without temperature setting for combining with free-standing fittings - 35 742 970 90

\_ \_\_\_\_



### Required miscellaneous

eSET Touchfree Basin mixer without temperature setting for combining with wall-mounted fittings -

•min. recess depth 90 mm

•max. recess depth 125 mm


35 743 970 90


#### Recommended miscellaneous

Extension for Touchfree 500 mm - 12 765 970 90



ST 010 203 0740 mm [inches]





### Certificates


LGA\_29120. WRAS\_1906116. IAPMO\_EGS. CE000001\_eSet\_Tou CE000002\_eSet\_Tou

chfree\_20171206\_D chfree\_20171206\_E E\_signed. N\_signed.

LGA\_29119.



ST 010 203 0740

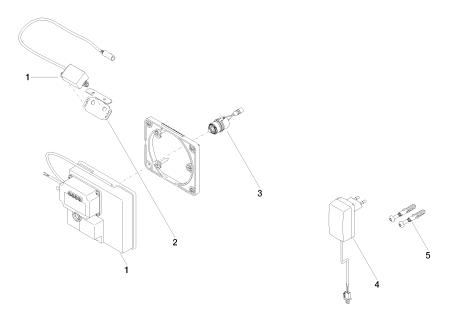

### Spare parts list

Item Number	Name	Quantity used	Delivery time
90 10 01 177 00 90	electronic accessories	1	2
90 17 20 199 00 90	holder	1	2
04 30 50 079 00 90	valve	1	2
04 10 01 050 00 90	power supply	1	60
04 30 31 024 01 90	fixing set	1	2
	90 10 01 177 00 90 90 17 20 199 00 90 04 30 50 079 00 90 04 10 01 050 00 90	90 10 01 177 00 90 electronic accessories 90 17 20 199 00 90 holder 04 30 50 079 00 90 valve 04 10 01 050 00 90 power supply	90 10 01 177 00 90 electronic accessories 1 90 17 20 199 00 90 holder 1 04 30 50 079 00 90 valve 1 04 10 01 050 00 90 power supply 1



ST 010 203 0740



- 125mm projection
- fixed spout
- rectangular, air-enriched flow
- hole diameter 37 mm
- 1/2" connection
- plug-link mounting
- max. flow 5 l/min
- lead-free

The mounting height from the top edge of the basin to the centre of the connection should be at least 125 mm. The front edge of the spout should be at least 20 mm in front of the back edge of the sink.

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

#### Recommended miscellaneous

Concealed wall elbow -

35 085 970 90



max. recess depth 163 mmmin. recess depth 90 mm




ST 010 203 0740




ST 010 203 0740 mm [inches]






### Flow rate chart






ST 010 203 0740

### Trajectory diagram





ST 010 203 0740

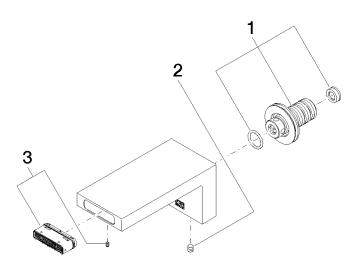

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 24 03 108 00 90	nipple set	1	2
2	90 31 11 004 00 90	pin	1	2
3	90 29 03 067 00 90	aerator	1	2