

ST 010 205 4980



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette for spout 60 x 60mm
- 1/2" connection
- plug-link mountingmax. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain. ATTENTION: Separate terms and conditions for electronic articles are applicable.

Individual components of this set

You need the following components for this set



42 766 970 90

1x

13 800 980-00

We reserve the right to change designs, product range and technical specifications without prior notice. More information can be found at: www.dornbracht.com +49 (0) 2371 8899 900 mail@dornbracht.com



ST 010 205 4980





	eSET Touchfree Basin m without temperature setti		10 90	eSET Touchfree Basin mixer without temperature setting for combining with wall-mounted	35 743 970 90	
Required miscellaneous eSET Touchfree Basin mixer 35 742 970 90			·	Required miscellaneous		
		ATTENTION: Separat electronic articles are	e terms and conditions e applicable.	for		
		Cannot be combinec drain.	d with basins that have	a closing		
		Cannot be combined with basins in conducting materials (e.g. steel. river stone).				
ST 010 205 4980		magnetic valve 100-240 V AC / 12 supply unit, incl. co Cannot be combine materials (e.g. stee Cannot be combine closing drain.	disinfection o time sors with self-calibratio V DC, 50-60 Hz, 18 W untry-specific adapter s ed with basins in condi- sed with basins that ha rate terms and conditi	power set ducting we a		

Extension for Touchfree 500 mm - 12 765 970 90



ST 010 205 4080 mm [inches]






Certificates				
LGA_29120.	WRAS_1906116.	IAPMO_EGS.	CE000001_eSet_Tou chfree_20171206_D E_signed.	CE000002_eSet_Tou chfree_20171206_E N_signed.

LGA_29119.



ST 010 205 4980

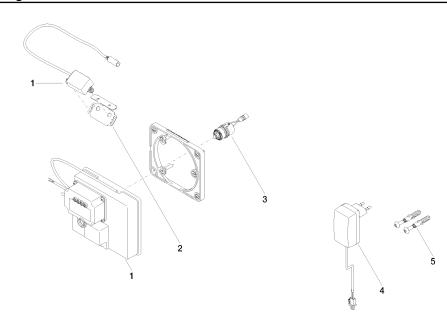

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 177 00 90	electronic accessories	1	2
2	90 17 20 199 00 90	holder	1	2
3	04 30 50 079 00 90	valve	1	2
4	04 10 01 050 00 90	power supply	1	60
5	04 30 31 024 01 90	fixing set	1	2



ST 010 205 4980



- 185mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 37 mm
- rosette 60 x 60 mm
- 1/2" connection
- plug-link mounting max. flow 7 l/min
- Inax. now 7 %
 lead-free
- WRAS 1904065

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

35 085 970 90

Recommended miscellaneous

Concealed wall elbow -	
•max, recess depth 163 mm	


max. recess depth 163 mr
 min. recess depth 90 mm




ST 010 205 4980



ST 010 205 4980 mm [inches]



Flow rate chart




Certificates

LGA_18592. WRAS_1904065.



ST 010 205 4980

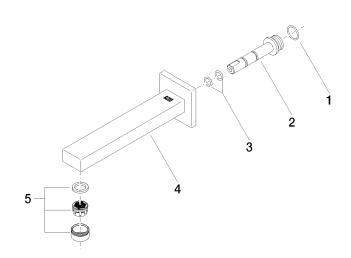

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 14 10 053 90	seal	1	2
2	09 24 04 135 90	nipple	1	2
3	09 14 10 008 90	seal	2	2
4	90 11 68 004 00-00	spout	1	10
5	90 23 01 029 02-00	aerator	1	10