

Concealed wall mounting -

35 003 970 90



- red brass, lead-free
- 2x female thread 1/2" connections
- dust cover
- anti-water packing
- soundproofing
- WRAS 2101023, 2003025

Can only be combined with exposed trim parts 26  
024 661-FF / 36 013 660-FF / 36 045 660-FF / 36  
013 970-FF / 36 045 970-FF / 36 804 661-FF.

Recommended miscellaneous



**Extension 25 mm -**  
•Can only be combined with  
exposed trim parts 36 804 661-FF.

12 179 970 90

Required miscellaneous




**Drybox Concealed thermostat -**  
•Overflow is part of the scope of  
delivery.

XS-08 3952


Concealed wall mounting -

35 003 970 90

mm [inches]

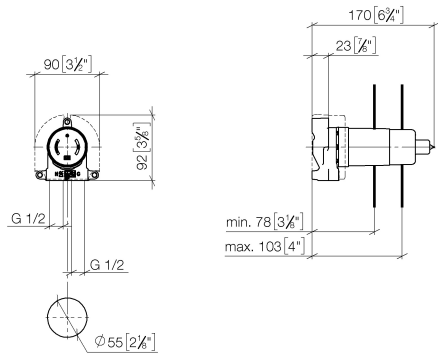

Flow rate chart

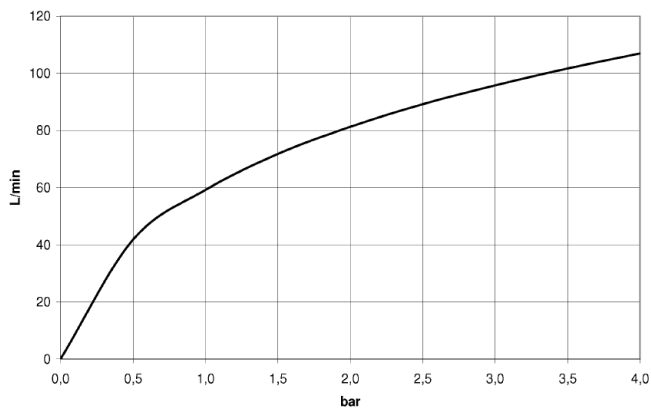

Codes & Standards

DIN 4109

EN 817

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Concealed wall mounting -

---

35 003 970 90

### Certificates

---

WRAS\_2101

DVGW\_DW-  
6512DN0

WRAS\_2003


LGA\_18

## Concealed wall mounting -

35 003 970 90

Product version up to 10/2/2019

**Product version from 10/2/2019**

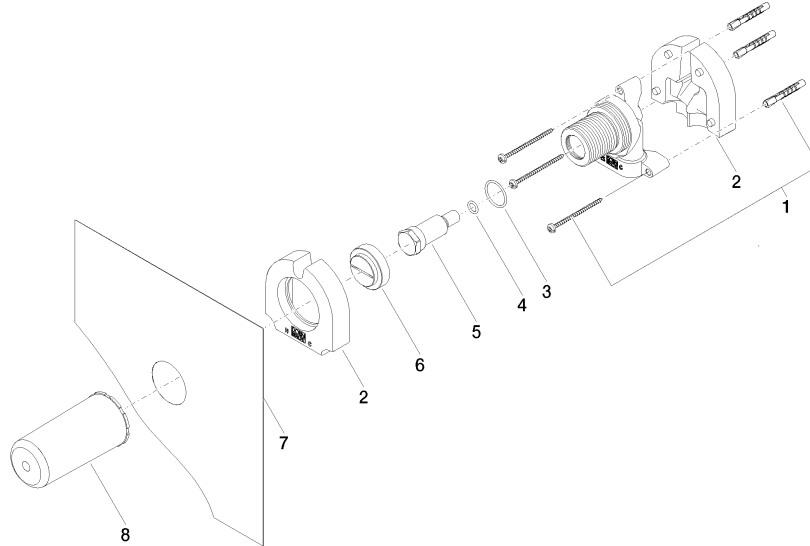



Concealed wall mounting -

35 003 970 90

Spare parts list

Product version up to 10/2/2019

**Product version from 10/2/2019**

No.	Item Number	Name	Quantity used	Delivery time
	05 30 31 029 00 90	fixing set	9	2