

**Concealed single-lever mixer with cover plate with integrated shower connection - Platinum**

SERIES SPECIFIC

36 045 660    Product version up to 5/15/2020



- cover plate Ø 78 mm
  - WRAS
- Intrinsic protection against back flow.**
- Article cannot be extended, please check the depth of the installation location!**
- Intrinsic protection against back flow.
- Article cannot be extended, please check the depth of the installation location!

**Required miscellaneous**




- Concealed wall mounting -**                      35 003 970 90
- max. recess depth 103 mm
  - min. recess depth 78 mm


## Concealed single-lever mixer with cover plate with integrated shower connection - Platinum

SERIES SPECIFIC

36 045 660 Product version up to 5/15/2020  
mm [inches]

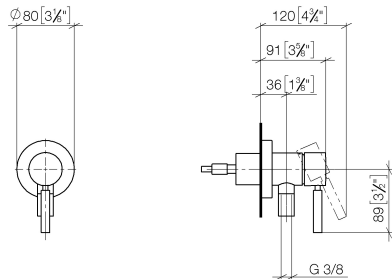

Flow rate chart

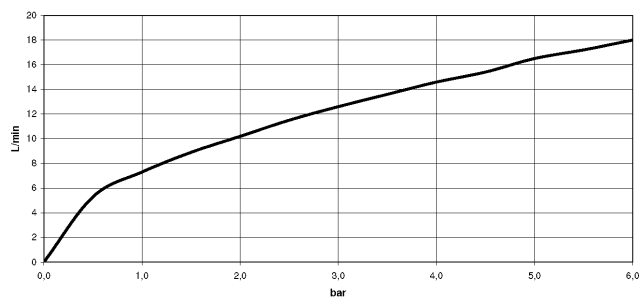

### Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



Concealed single-lever mixer with cover plate with integrated shower connection - Platinum

SERIES SPECIFIC

36 045 660    Product version up to 5/15/2020


Certificates and sustainability

Belgaqua\_21-025-2    LGA\_29                      WRAS\_2101

## Concealed single-lever mixer with cover plate with integrated shower connection - Platinum

SERIES SPECIFIC

36 045 660 Product version up to 5/15/2020

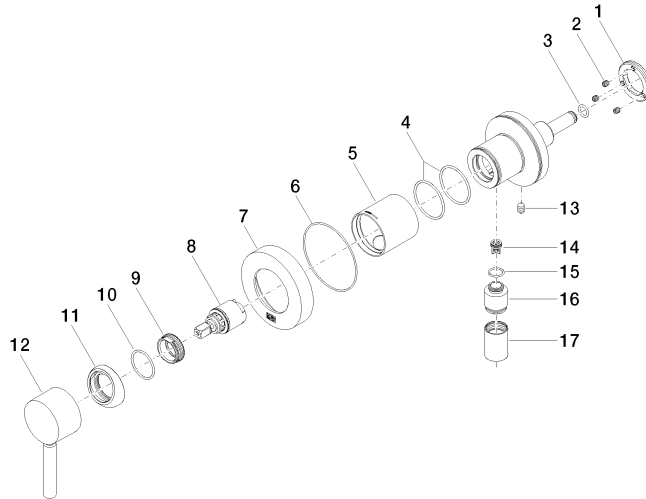

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	09 18 40 215-08	sleeve	1.00	40
7	09 27 66 000-08	rosette	1.00	40
4	09 14 10 111 90	seal	2.00	2
15	09 14 10 213 90	seal	1.00	2
6	09 14 10 518 90	seal	1.00	60
9	09 24 04 266 90	nut	1.00	2
8	90 15 05 044 00 90	cartridge	1.00	2
10	09 14 10 120 90	seal	1.00	2
3	09 14 10 139 90	seal	1.00	2
14	09 23 01 131 90	back-flow preventer	1.00	2
11	09 28 30 041-08	cover	1.00	40
16	09 24 03 281-08	nipple	1.00	40
1	09 24 77 002 90	nut	1.00	2
12	90 20 66 006 00-08	handle	1.00	40
13	09 31 11 144 90	pin	1.00	2
17	90 21 02 069 00-08	cover	1.00	40
2	90 31 11 030 00 90	pin	3.00	2