

TARA Bath spout for wall mounting - Dark Chrome

TARA

13 801 892



- 200mm projection
- circular normal flow
- rosette Ø 55 mm
- hole diameter 37 mm
- 1/2" connection
- max. flow 29 l/min at 3 bar flow pressure
- WRAS

| | | |
|---|-------------------------------------|---------------|
|  | Dark Chrome | 13 801 892-19 |
|  | Chrome | 13 801 892-00 |
|  | Brushed Platinum | 13 801 892-06 |
|  | Platinum | 13 801 892-08 |
|  | Brushed Light Gold | 13 801 892-27 |
|  | Brushed Durabronze (23kt Gold) | 13 801 892-28 |
|  | Matte Black | 13 801 892-33 |
|  | Brushed Dark Brass | 13 801 892-39 |
|  | Brushed Bronze | 13 801 892-42 |
|  | Brushed Champagne (22kt Gold) | 13 801 892-46 |
|  | Champagne (22kt Gold) | 13 801 892-47 |
|  | Brushed Chrome | 13 801 892-93 |
|  | Brushed Dark Platinum | 13 801 892-99 |

Recommended miscellaneous

Concealed wall elbow -


35 085 970 90




- max. recess depth 163 mm
- min. recess depth 90 mm

13 801 892

mm [inches]

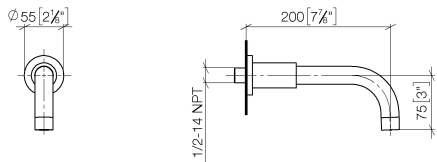

Flow rate chart

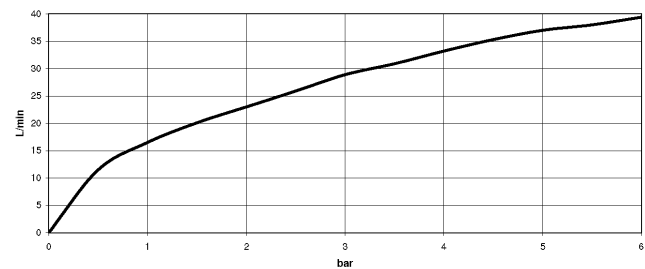

Codes & Standards

| | | | |
|------------------------|-----------------------------|-----------|----------|
| ASME A112.18.1 | cUPC | DIN 4109 | ISO 3822 |
| Scottish Water Byelaws | UK Water Supply Regulations | Ü-Zeichen | |



TARA Bath spout for wall mounting - Dark Chrome

TARA

13 801 892

Certificates and sustainability

LGA_18

IAPMO_4976

WRAS_240602

