

17 861 680 Product version from 5/28/2022



- 145mm projection
- rigid, thermally insulated spout
- laminar flow
- height of mixer 233 mm
- height up to laminar flow regulator 213 mm
- hole diameter 35 mm
- provides filtered, hot water up to 93°C
- · provides filtered, cold water
- max. flow 2 l/min at 3 bar flow pressure
- ready-to-use control unit for wall mounting (137mm x 159mm x 60mm)
- electronic magnetic valve
- 100-230 V, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- lead-free
- Spout ring cannot be removed.
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and filter.

In addition, the installation must be above a kitchen sink.

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at

www.dornbracht.com/professional

A minimum flow pressure of 3 bar is necessary for the HOT & COLD WATER DISPENSER to work perfectly in conjunction with a hot water tank and

In addition, the installation must be above a kitchen

The filter cartridge must be changed every six months. The installation instructions contain further information for guidance.

Detailed planning information and technical data can be found at www.dornbracht.com/professional

Required miscellaneous




Hot water tank incl. filter -

12 892 970 90


	Brushed Durabrass Gold)	(23kt	17 861 68	30-28
	Chrome		17 861 68	30-00
	Brushed Pla	atinum	17 861 68	30-06
1	Platinum		17 861 68	30-08
•	Dark Chrom	ne	17 861 68	30-19
	Brushed Champagne Gold)	e (22kt	17 861 68	30-46
	Champagne Gold)	e (22kt	17 861 68	30-47
	Brushed Da Platinum	rk	17 861 68	30-99



17 861 680 Product version from 5/28/2022



Flow rate chart



Codes & Standards

DIN 4109 ISO 3822 NSF372 NSF61

Ü-Zeichen



LOT

17 861 680 Product version from 5/28/2022

Certificates


IAPMO_N-4

LGA_28

IAPMO_6



17 861 680 Product version from 5/28/2022

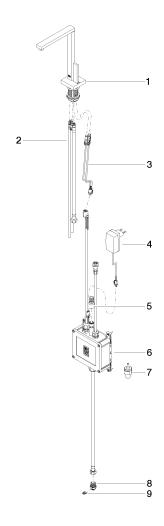

Spare parts list

No.		Item Number	Name	Quantity used	Delivery time
	1	90 17 85 100 03-28	fitting	1	30
	2	90 30 04 067 00 90	hose	1	2
	3	90 10 01 048 00 90	electronic accessories	1	2
	4	04 10 01 246 00 90	electronic accessories	1	2
	5	12 866 970 90	adaptor	1	2
	6	90 11 11 064 01 90	electronic accessories	1	2
	7	90 24 04 291 00 90	insert	1	2
	8	09 24 04 293 90	nipple	1	2
	9	09 16 01 045 90	ring	1	2