

## Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Dark Brass

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

### Technical data:

- Distance to ceiling from bottom edge of shower 40 mm

### Ceiling module power supply

- 350mA (CC)

### Spot lighting















- LED colour temperature approx. 3000 K
- Bulbs protected against splashing water

### Electric:

- Technology: LED, not dimmable
- Provided by customer: Light switch
- Contains energy efficiency class bulbs

### Planning tips:


- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- WRAS

|   |                               |               |
|---|-------------------------------|---------------|
|    | Brushed Dark Brass            | 28 032 970-39 |
|    | Chrome                        | 28 032 970-00 |
|    | Brushed Platinum              | 28 032 970-06 |
|    | Platinum                      | 28 032 970-08 |
|    | Dark Chrome                   | 28 032 970-19 |
|    | Light Gold                    | 28 032 970-26 |
|    | Brushed Light Gold            | 28 032 970-27 |
|    | Brushed Durabrass (23kt Gold) | 28 032 970-28 |
|    | Matte Black                   | 28 032 970-33 |
|   | Brushed Bronze                | 28 032 970-42 |
|  | Brushed Champagne (22kt Gold) | 28 032 970-46 |
|  | Champagne (22kt Gold)         | 28 032 970-47 |
|  | Brushed Chrome                | 28 032 970-93 |
|  | Brushed Dark Platinum         | 28 032 970-99 |


## Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Dark Brass

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022  
mm [inches]

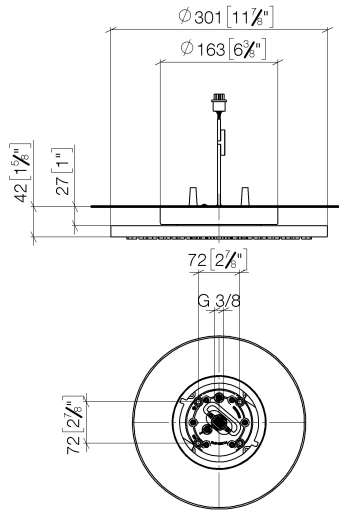

### Flow rate chart

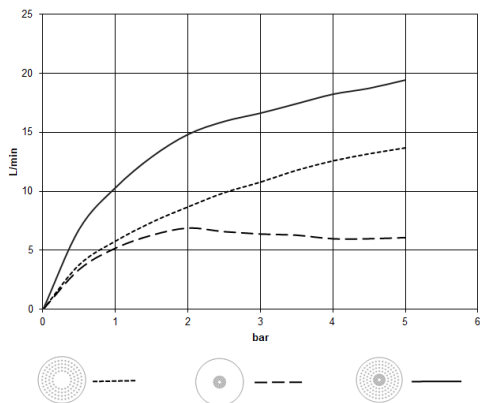

### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Dark Brass

---

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022

Certificates and sustainability

---

LGA\_38


WRAS\_240502

## Rain shower for surface-mounted ceiling installation with light 300 mm - Brushed Dark Brass

SERIES SPECIFIC

28 032 970 Product version from 5/1/2022

Parts for other  
finishes can be found  
here: [Chrome](#)

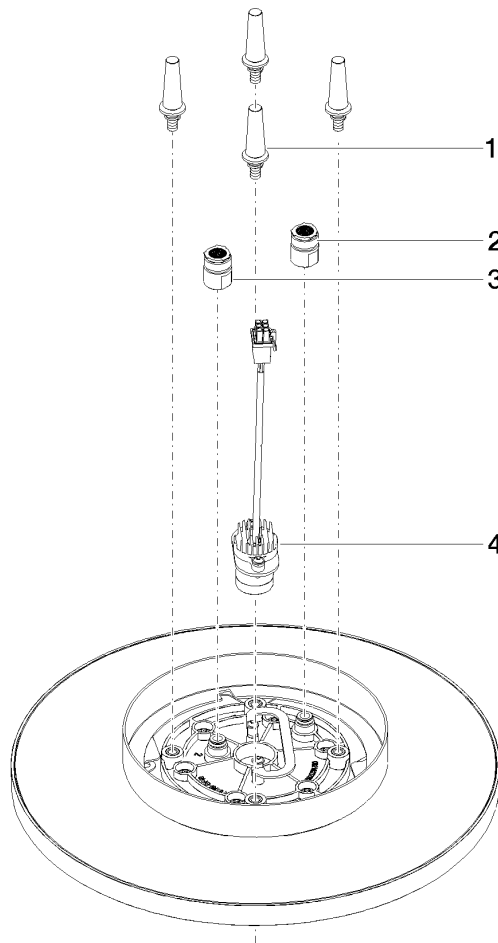

### Spare parts list

| No. | Item Number        | Name                   | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 4   | 90 10 01 225 00 90 | electronic accessories | 1.00          | 2             |
| 3   | 90 24 03 309 00 90 | connection             | 1.00          | 2             |
| 2   | 90 24 03 309 01 90 | connection             | 1.00          | 2             |
| 1   | 90 17 20 263 00 90 | fixing set             | 1.00          | 2             |